
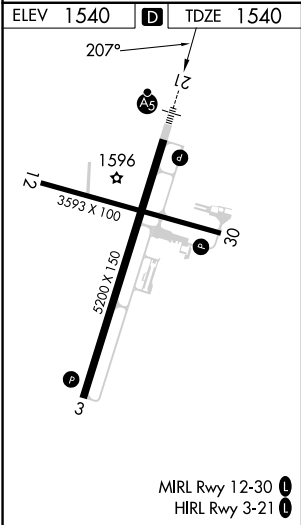
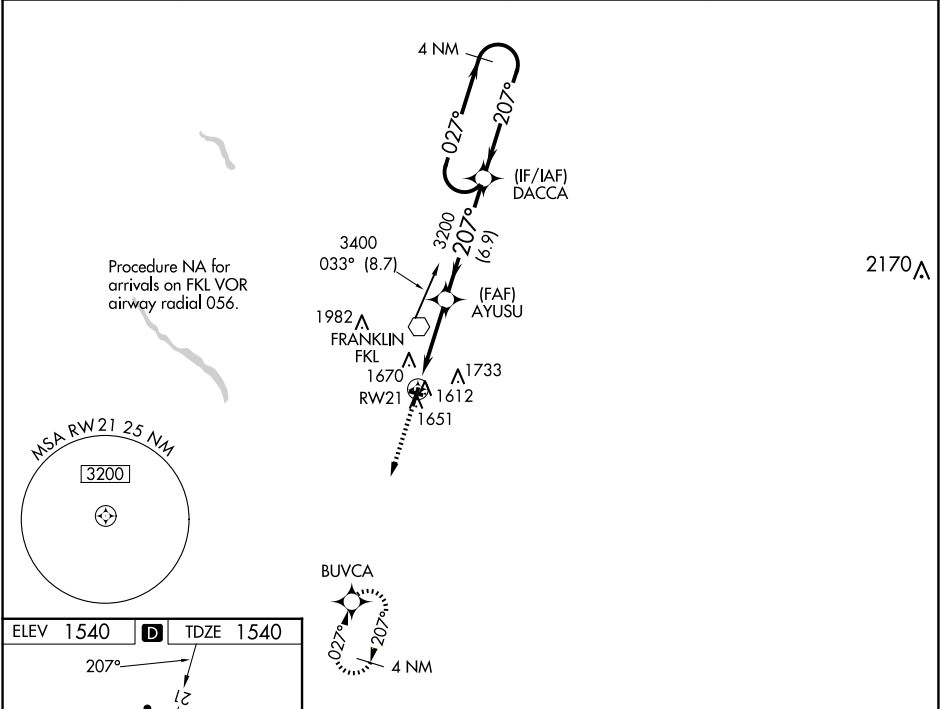


WAAS CH 77501 W21A	APP CRS 207°	Rwy Idg TDZE Apt Elev	5200 1540 1540
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 21
VENANGO RGNL (F'KL)

RNP APCH. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 45°C (114°F). Circling Rwy 12 NA at night. For inop ALS, increase LPV all Cats visibility to ¾ SM and LNAV Cats C/D visibility to 1 SM.			MALSR 	MISSED APPROACH: Climb to 3400 direct BUVCA and hold.
AWOS-3PT 118.175	YOUNGSTOWN APP CON ★ 126.25 322.3	CLNC DEL 126.25	UNICOM 122.7 (CTAF) 0	

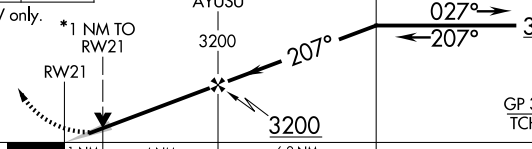

3400		BUVCA		4 NM Holding Pattern		
						
* LNAV only.						
						
RW21		AYUSU				
1 NM		4 NM		6.9 NM		
3200		3200		3400		
GP 3.00°		TCH 55				
CATEGORY	A		B		C	D
LPV DA	1803-½ 263 (300-½)					
LNAV/VNAV DA	1901-¾ 361 (400-¾)					
LNAV MDA	1900-½ 360 (400-½)			1900-5/8 360 (400-5/8)		
CIRCLING	1960-1¼ 420 (500-1¼)	2000-1¼ 460 (500-1¼)	2040-1½ 500 (500-1½)	2100-2 560 (600-2)		