

WAAS CH 78406 W31A	APP CRS 313°	Rwy Idg 7400 TDZE 1166 Apt Elev 1182
--	------------------------	---

RNAV (GPS) RWY 31
FALLS INTL/EINARSON FLD. (INL)



T When local altimeter setting not received, use Baudette altimeter setting: increase LPV DA to 1589 feet and visibility all Cats $\frac{1}{2}$ SM; increase LNAV/VNAV DA to 1627 feet and visibility all Cats $\frac{1}{2}$ SM; increase all MDAs 140 feet and visibility LNAV Cat C $\frac{1}{4}$ SM and Circling Cat C and D $\frac{1}{2}$ SM. For inop MALSR when using Baudette altimeter setting, increase LPV visibility $\frac{1}{2}$ mile all Cats. For inop MALSR, increase LPV visibility $\frac{1}{2}$ mile all Cats, inop table does not apply to LNAV Cat D. VDP NA when using Baudette altimeter setting. Baro-VNAV NA when using Baudette altimeter setting. Circling to Rwy 4-22 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 47°C (116°F). DME/DME RNP-0.3 NA.

MALSR



MISSED APPROACH:
Climb to 3300 direct
HODEV and hold.

ASOS 120.0	MINNEAPOLIS CENTER 120.9 377.1	UNICOM 122.8 (CTAF) 0
----------------------	--	---------------------------------

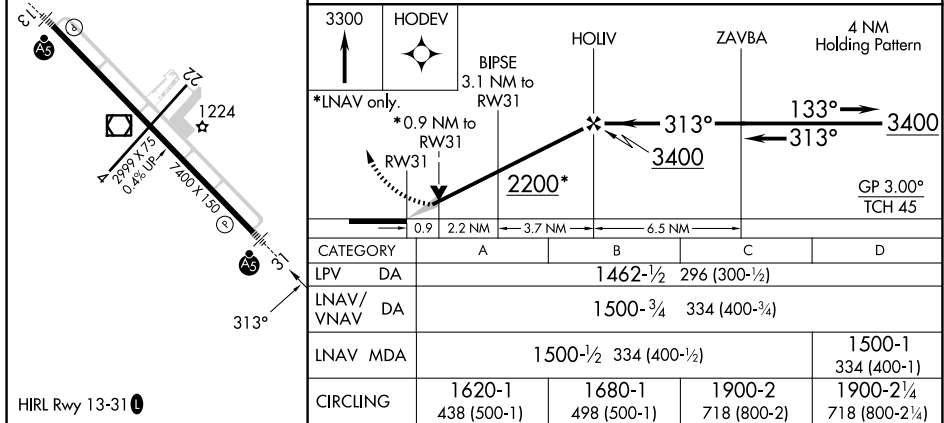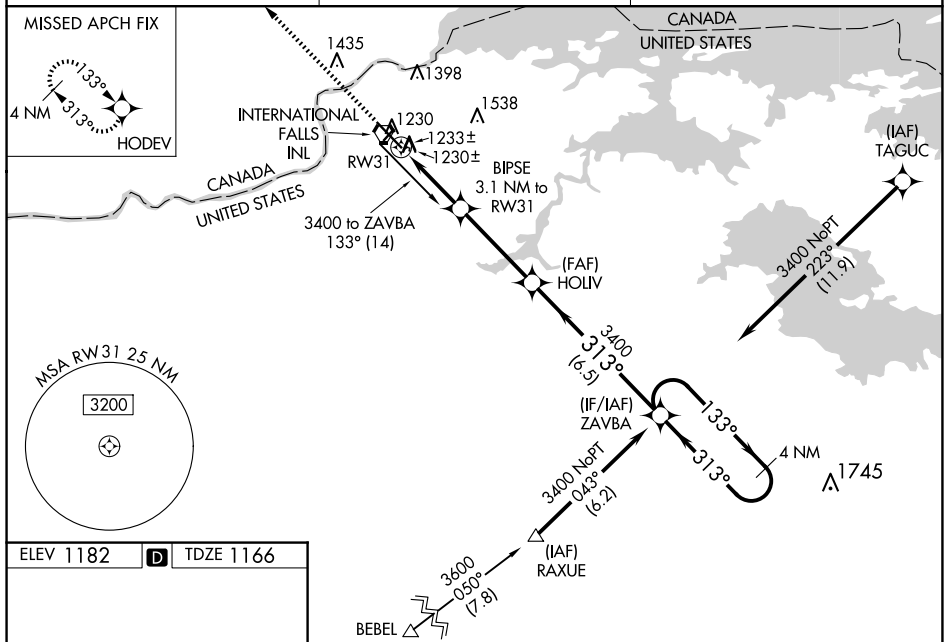

INTERNATIONAL FALLS, MINNESOTA
Orig-B 30DEC21

48°34'N-93°24'W

FALLS INTL/EINARSON FLD (INL)
RNAV (GPS) RWY 31

NC-1, 23 JAN 2025 to 20 FEB 2025

NC-1 23.JAN 2025 to 20.FEB 2025