

ASOS
120.625
SALT LAKE CENTER
133.45 317.625
UNICOM
122.8


TAKEOFF MINIMUMS

Rwy 12: Standard with minimum climb of 280' per NM to 10600, or 5100-3 for climb in visual conditions.

Rwy 18: Standard with minimum climb of 267' per NM to 10600, or 5100-3 for climb in visual conditions.

Rwy 30: Standard with minimum climb of 539' per NM to 10600, or 5100-3 for climb in visual conditions.

Rwy 36: Standard with minimum climb of 238' per NM to 10600, or 5100-3 for climb in visual conditions.

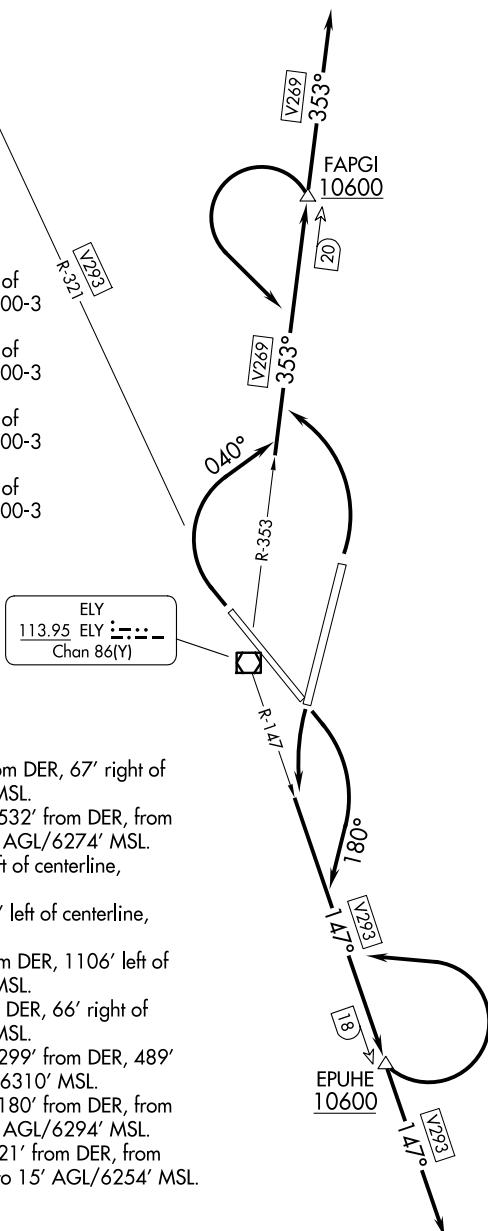

NOTE: Chart not to scale.

(CONTINUED ON FOLLOWING PAGE)