

WAAS CH 56223 W03A	APP CRS 028°	Rwy Idg TDZE 888 Apt Elev 918	8003
--	------------------------	---	-------------

RNAV (GPS) RWY 3

APPLETON INTL (ATW)

▼


▲

Baro-VNAV NA below -16°C (4°F). DME/DME RNP-0.3 NA. When local altimeter setting not received use Green Bay-Austin Straubel Intl altimeter setting and increase all DAs/MDAs 100 feet. Baro/VNAV and VDP NA when using Green Bay-Austin Straubel Intl altimeter setting. For inoperative MALSR increase LPV visibility to RVR 4000 all Cats.

MALSR

MISSED APPROACH: Climb to 2700 direct ASIGE and hold.

ATIS 127.15	GREEN BAY APP CON★ 126.3 338.2	APPLETON TOWER★ 119.6 (CTAF) 0	GND CON 121.7	UNICOM 122.95
-----------------------	--	---	-------------------------	-------------------------

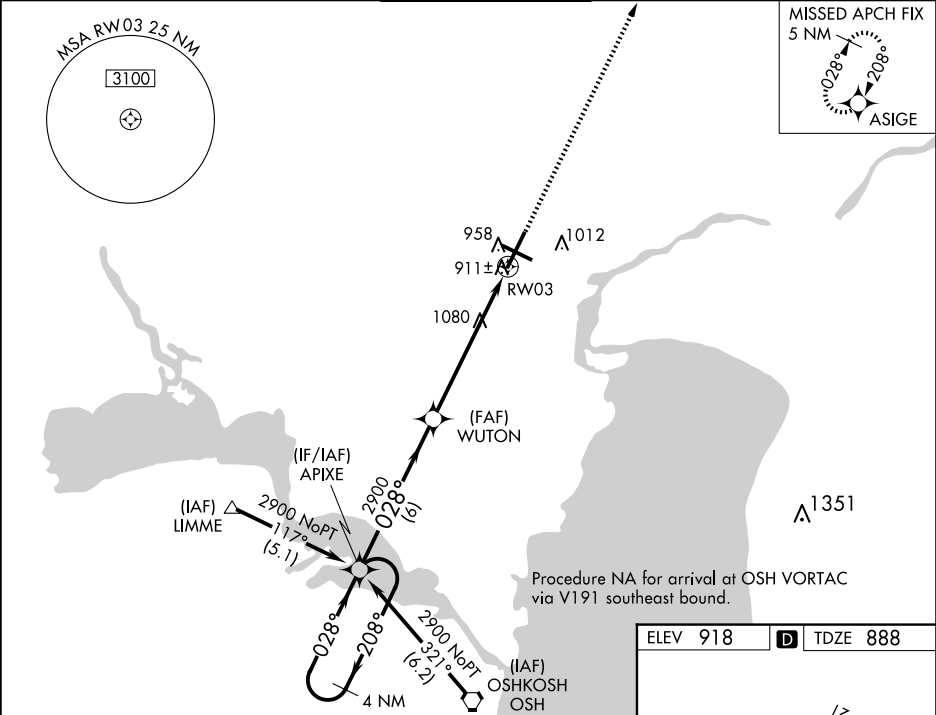

4 NM Holding Pattern		APIXE	WUTON	2700	ASIGE
2900 ← 208°		→ 028°	→ 028°	*1.5 NM to RW03	
GP 3.00°		2900	*LNAV only		RW03
TCH 47		6 NM	4.6 NM	1.5 NM	
CATEGORY	A	B	C	D	
LPV DA	1138/24		250 (300-½)		
LNAV/VNAV DA	1232/40		344 (400-¾)		
LNAV MDA	1400/24	512 (500-½)	1400/50 512 (500-1)	1400/60 512 (500-¼)	
CIRCLING	1400-1	482 (500-1)	1400-1½ 482 (500-½)	1480-2 562 (600-2)	

