

WAAS CH 70526 W05A	APP CRS 054°	Rwy Idg 5502 TDZE 455 Apt Elev 459
--	------------------------	---

RNAV (GPS) RWY 5

MOORE COUNTY (SOP)


T For uncompensated Baro/VNAV systems, LNAV/VNAV NA below -1.5°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. For inop MALSR, increase LNAV/VNAV all Cats visibility to ¾ mile, LNAV Cats A/B visibility to 1 mile and LNAV Cats C/D visibility to 1½ mile. When local altimeter setting not received, use Sanford altimeter setting and increase all DA 88 feet and all MDA 100 feet, increase LNAV/VNAV all Cats visibility ½ mile, LNAV Cats C/D visibility ¼ mile, and Circling Cat C ½ mile. When using Sanford altimeter setting, for inop MALSR increase LNAV/VNAV all Cats visibility to 1½ mile, LNAV Cats A/B visibility to 1 mile, and LNAV Cat C/D visibility to 1¾ mile. Baro-VNAV and VDP NA when using Sanford altimeter setting.

MALSR



MISSED APPROACH:
Climb to 2500 direct
OWWEN and hold.

AWOS-3PT 127.575	FAYETTEVILLE APP CON 127.8 343.725	CLNC DEL 127.0	UNICOM 123.05 (CTAF) 0
----------------------------	--	--------------------------	----------------------------------

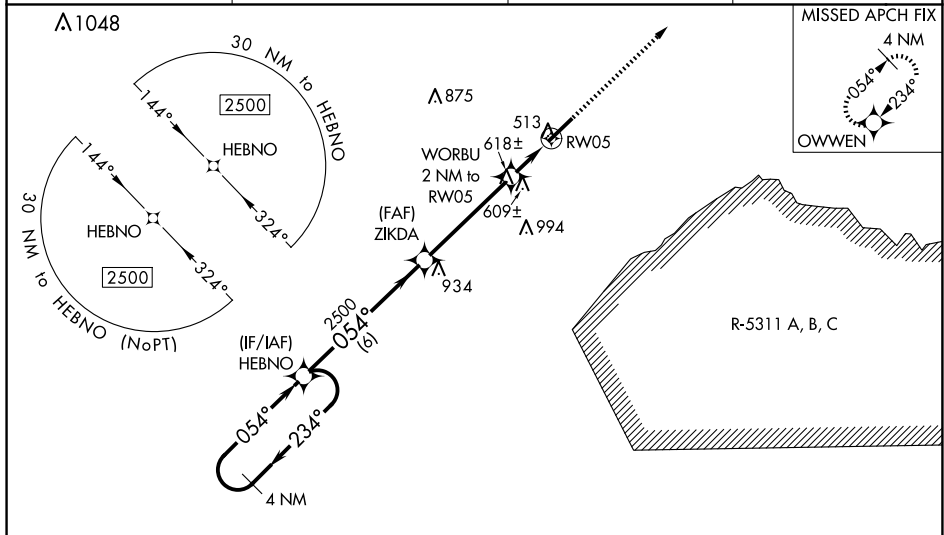

4 NM Holding Pattern

GP 3.00°
TCH 39

HEBNO
ZIKDA 2500
WORBU 2 NM to RW05

*LNAV only

CATEGORY	A	B	C	D
LPV DA	655-½		200 (200-½)	
LNAV/ VNAV DA	750-½		295 (300-½)	
LNAV MDA	860-½ 405 (500-½)		860-¾ 405 (500-¾)	
C CIRCLING	880-1 421 (500-1)	920-1 461 (500-1)	1100-1¼ 641 (700-1¼)	1360-3 901 (1000-3)