RNAV (GPS) RWY 3

MANHATTAN RGNL (MHK)

WAAS CH 73018 W03A	APP CRS 036°	Rwy Idg 7030 / TDZE 1057 / Apt Elev 1066

RNP APCH - GPS.

T A Circling NA northwest of Rwy 3-21. Rwy 3 helicopter visibility reduction below ¾ SM NA. Inop table does not apply to LPV all Cats. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 1⅛ SM, increase LNAV Cats A/B visibility to 1 SM and LNAV Cats C/D visibility to 1⅛ SM.

MALSR (A5)

MISSED APPROACH: Climb to 3100 direct BIRME and hold.

ASOS 119.075	MARSHALL AAF GCA★ 121.25 254.35	MANHATTAN TOWER★ 118.55 (CTAF) L	GND CON 121.85

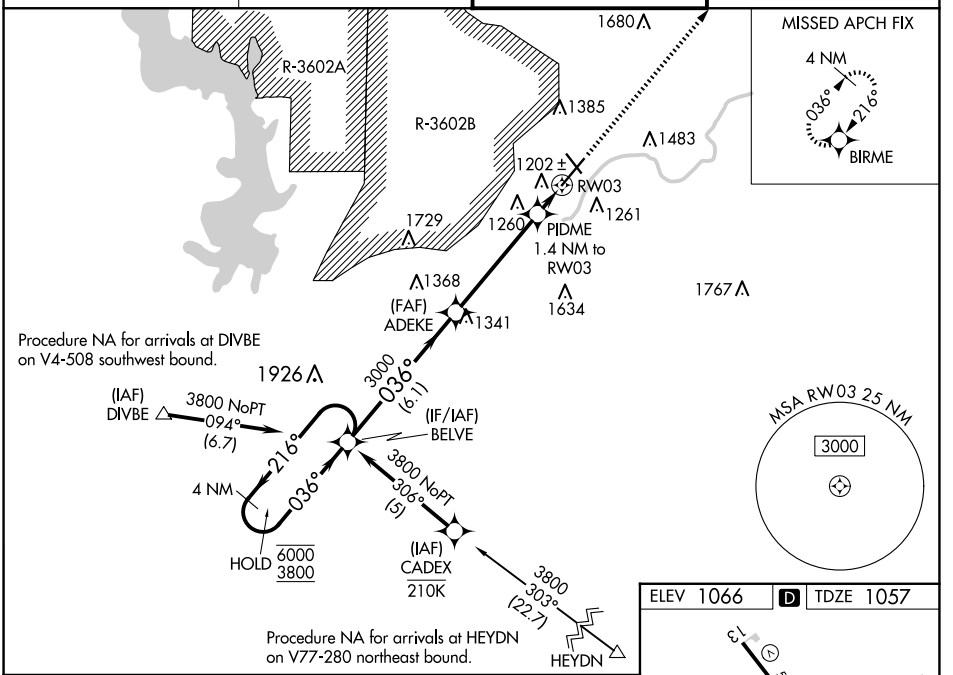

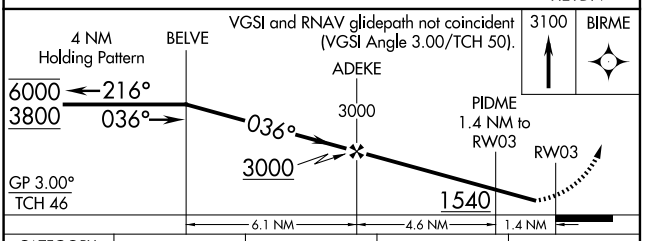

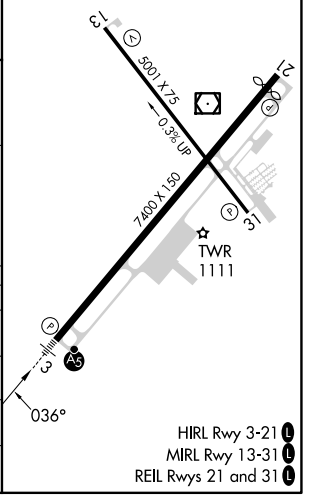

CATEGORY	A	B	C	D
LPV DA	1257-½	200 (200-½)		
LNAV/VNAV DA	1441-¾	384 (400-¾)		
LNAV MDA	1460-¾	403 (400-¾)		
CIRCLING	1540-1 474 (500-1)	1620-1 554 (600-1)	1920-2½ 854 (900-2½)	1920-2¾ 854 (900-2¾)

NC-2, 23 JAN 2025 to 20 FEB 2025
NC-2, 23 JAN 2025 to 20 FEB 2025