

WAAS CH 50314 W07A	APP CRS 066°	Rwy Idg TDZE 742 Apt Elev 742
--	------------------------	---


RNAV (GPS) RWY 7L

KENOSHA RGNL (ENW)

RNP APCH - GPS.			MALSR 	MISSED APPROACH: Climb to 2500 then climbing left turn to 3000 direct DIKHU and hold.		
	Circling Rwy 7R, 1.5 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to 1½ SM.					
ATIS 127.175	MILWAUKEE APP CON 135.875 317.725	KENOSHA TOWER ★ 118.6 (CTAF) 0 353.6	GND CON 121.875	CLNC DEL 121.875	CLNC DEL 118.6 (When twr closed)	

UNICOM

122.95

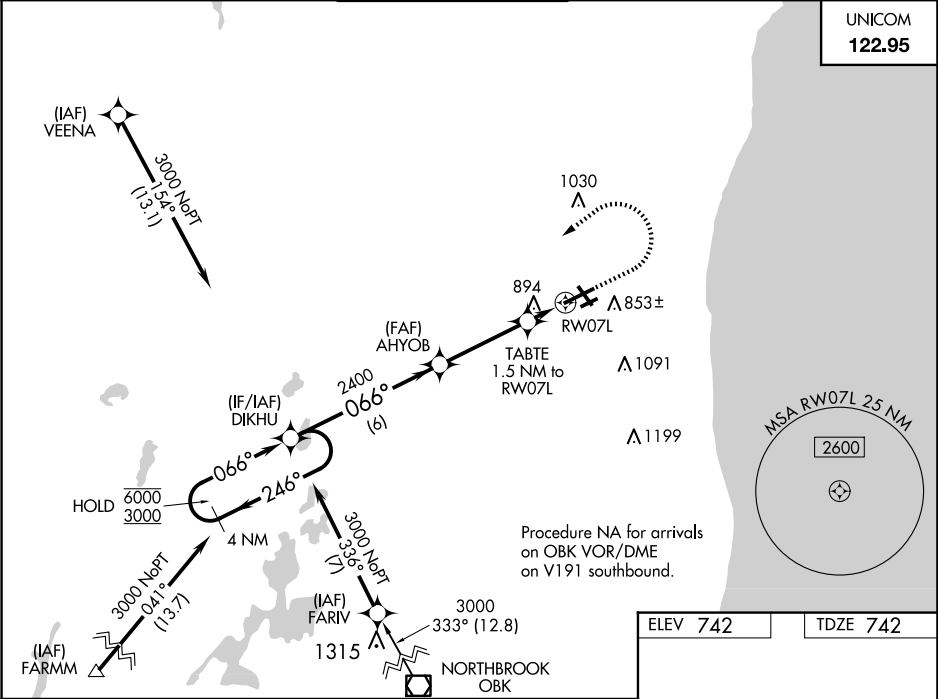

4 NM Holding Pattern DIKHU		2500 3000 DIKHU	
6000 ← 246°		AHYOB 2400	
3000 → 066°		TABTE 1.5 NM to RW07L	
GP 3.00° TCH 55		RW07L	
2400		1280	
6 NM		3.5 NM	
1.5 NM			
CATEGORY	A	B	C
LPV DA	942-½		200 (200-½)
LNAV/VNAV DA	1181-¾		439 (500-¾)
LNAV MDA	1160-½	418 (500-½)	1160-¾ 418 (500-¾)
CIRCLING	1200-1 458 (500-1)	1340-1 598 (600-1)	1400-1¾ 658 (700-1¾) 1440-2¼ 698 (700-2¼)

