

LOC I-CNO	APP CRS	Rwy Idg	4858
111.5	255°	TDZE	636
		Apt Elev	650

ILS or LOC RWY 26R

CHINO (CNO)


▼

▲

Helicopter visibility reduction below ¾ SM NA.
When local altimeter setting not received, use Ontario altimeter setting and increase DA to 940 feet and all visibilities ¼ SM; increase all MDAs 60 feet and visibility S-LOC 26R and Circling Cat C and D ¼ SM.

MISSED APPROACH: Climb to 1100 then climbing left turn to 4500 direct RAL VOR and hold, continue climb-in-hold to 4500.

ATIS	SOCAL APP CON	CHINO TOWER ★	GND CON	UNICOM
125.85	135.4 377.125	118.5 (CTAF)	121.6	122.95

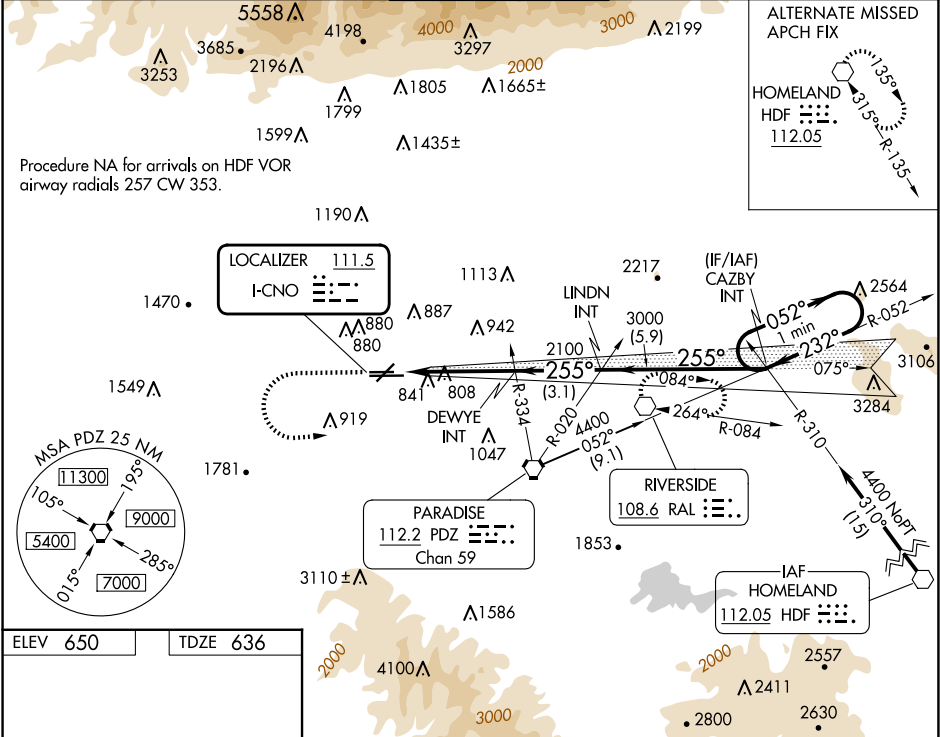

ELEV 650 TDZE 636

REIL Rwy 3 and 21
MIRL Rwy 3-21 and 8R-26L
HIRL Rwy 8L-26R

FAF to MAP 4.4 NM

Knots	60	90	120	150	180
Min:Sec	4:24	2:56	2:12	1:46	1:28