

|  |                        |                             |   |
|--|------------------------|-----------------------------|---|
| WAAS<br>CH <b>72713</b><br><b>W27A</b> | APP CRS<br><b>268°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>5100</b><br><b>925</b><br><b>926</b> |
|--|------------------------|-----------------------------|---|


# RNAV (GPS) RWY 27

NORTHEAST OHIO RGNL (HZY)

**▽** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C (-5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 2800 direct NOJWE and hold.



|                        |                                   |                               |                       |
|------------------------|-----------------------------------|-------------------------------|-----------------------|
| ASOS<br><b>118.325</b> | BUFFALO APP CON *<br><b>121.0</b> | UNICOM<br><b>122.8</b> (CTAF) | <b>123.3</b> <b>0</b> |
|------------------------|-----------------------------------|-------------------------------|-----------------------|

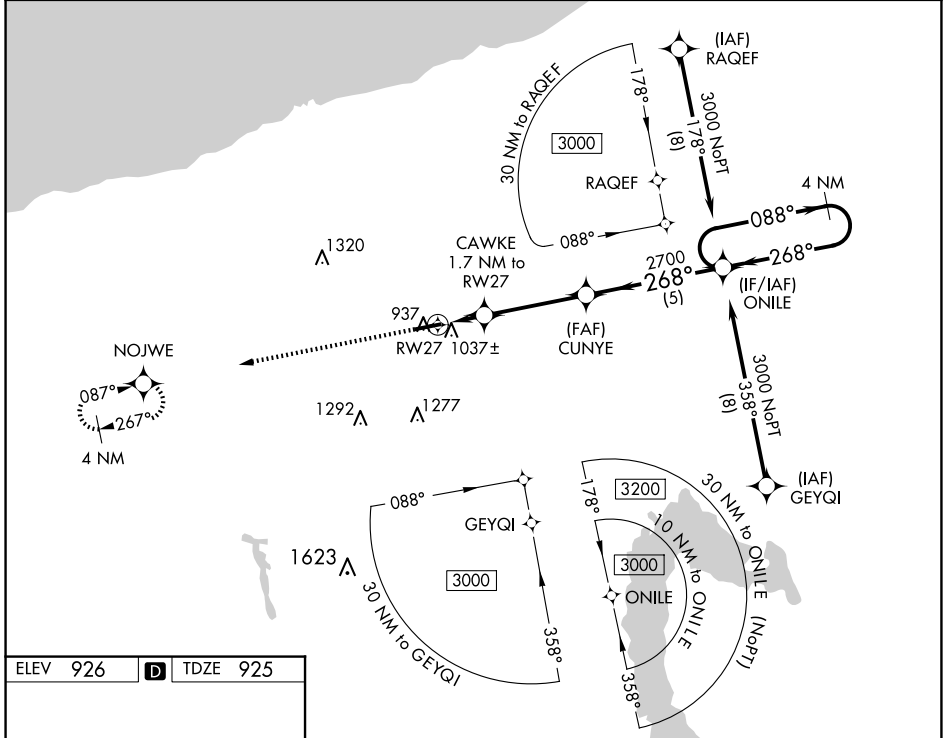

EC-2, 23 JAN 2025 to 20 FEB 2025

EC-2, 23 JAN 2025 to 20 FEB 2025

|          |          |          |
|----------|----------|----------|
| ELEV 926 | <b>D</b> | TDZE 925 |
|----------|----------|----------|

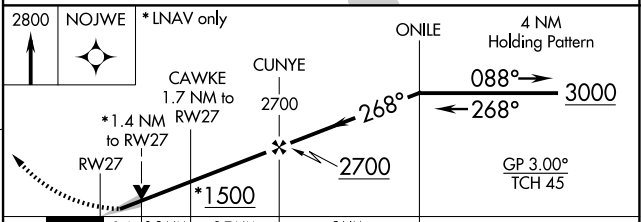

| CATEGORY     | A                     | B                     | C                             | D                     |
|--------------|-----------------------|-----------------------|-------------------------------|-----------------------|
| LPV DA       |                       | 1184-7/8              | 259 (300-7/8)                 |                       |
| LNAV/VNAV DA |                       | 1198-7/8              | 273 (300-7/8)                 |                       |
| LNAV MDA     |                       | 1300-1                | 375 (400-1)                   |                       |
| CIRCLING     | 1340-1<br>414 (500-1) | 1380-1<br>454 (500-1) | 1500-1 1/2<br>574 (600-1 1/2) | 1580-2<br>654 (700-2) |