


APP CRS	Rwy Idg	4126
237°	TDZE	850
	Apt Elev	851

RNAV (GPS) RWY 23

BLUFFTON (5G7)

RNP APCH.		MISSED APPROACH: Climbing right turn to 2500 direct FBC VORTAC and hold.
▼ ▲ NA Use Findlay altimeter setting; when not received use Lima altimeter setting and increase all MDA 20 feet and Circling Cat D visibility ¼ SM.		
FDY ASOS 132.85	TOLEDO APP CON 120.8 317.55	UNICOM 122.8 (CTAF) 0

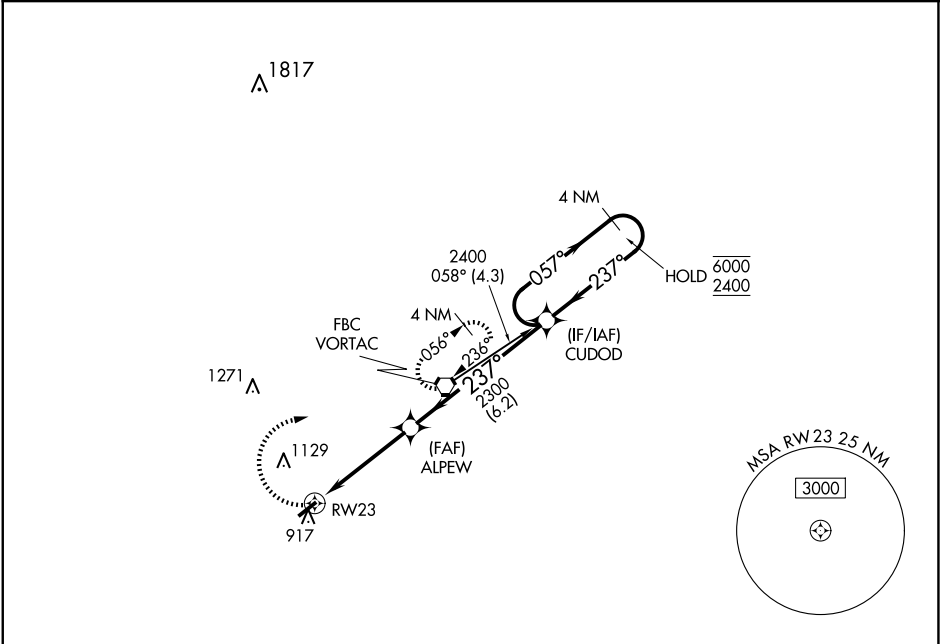

ELEV 851

TDZE 850

2500

FBC

ALPEW

2300

3.03°

TCH 43

4.4 NM

6.2 NM

CUDOD

4 NM Holding Pattern

057°

237°

6000

2400

CATEGORY	A	B	C	D
LNVA MDA	1340-1	490 (500-1)	1340-1⅜ 490 (500-1⅜)	1340-1½ 490 (500-1½)
CIRCLING	1360-1 509 (600-1)	1520-1 669 (700-1)	1520-1¾ 669 (700-1¾)	1520-2 669 (700-2)

REIL Rwy 5 and 23 0

MIRL Rwy 5-23 0

237° to RW23

4126 K 75

Λ 1007