

APP CRS

286°

Rwy Idg

4001

TDZE

683

Apt Elev

683

RNAV (GPS) RWY 28

HENRY COUNTY (7W5)

RNP APCH.


▼

▲ NA

Rwy 28 helicopter visibility reduction below ¾ SM NA.
Circling Rwy 10 NA at night. Use Toledo Express altimeter setting. When not received, procedure NA.

MISSED APPROACH: Climbing left turn to 2300 direct IZUMY and hold.

TOL ASOS	TOLEDO APP CON	UNICOM
118.75 290.225	134.35 307.0	123.0 (CTAF) 0

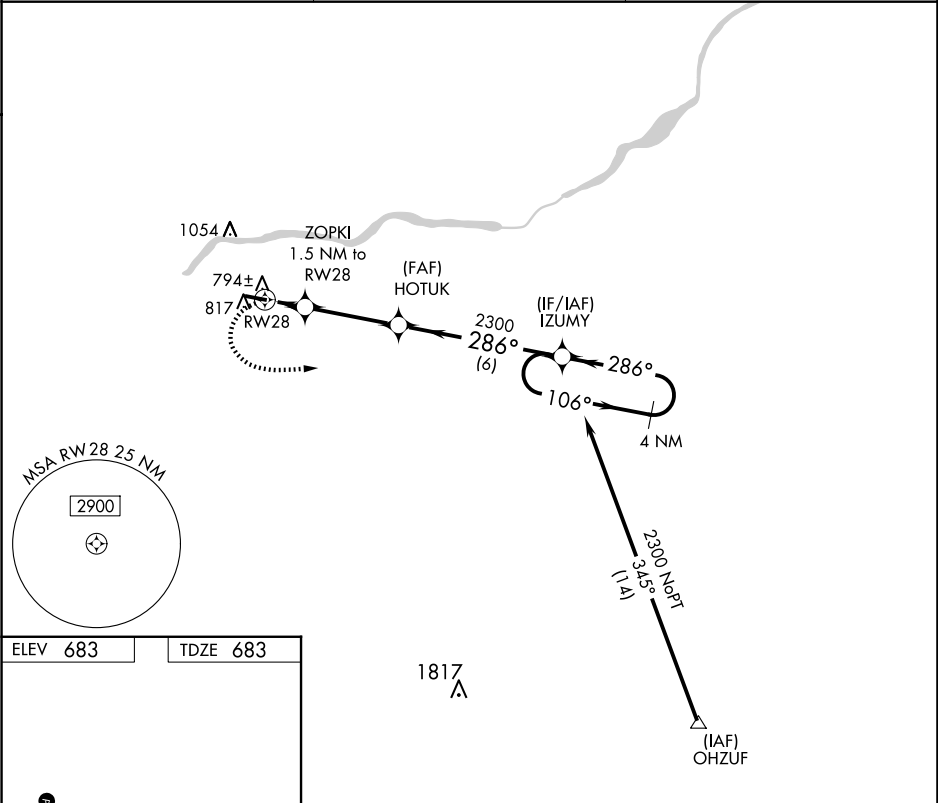

ELEV 683

TDZE 683

10


4001 X 60

286°

28

REIL Rwy 10-28 0

MIRL Rwy 10-28 0

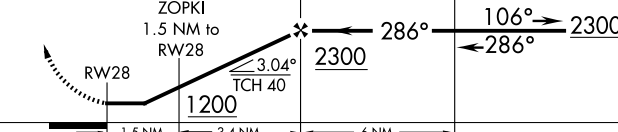2300		IZUMY		VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 25).		4 NM Holding Pattern	
							
1.5 NM		3.4 NM		6 NM			
CATEGORY	A		B		C		D
LNAV MDA	1100-1 417 (500-1)		1100-1½ 417 (500-1½)				NA
 CIRCLING	1220-1 537 (600-1)		1400-2 717 (800-2)				NA