RNAV (GPS) RWY 5

CHESAPEAKE RGNL (CPK)

WAAS	APP CRS	Rwy Idg	5500
CH 78222	048°	TDZE	18
W05A		Apt Elev	19

RNP APCH.

When local altimeter setting not received, use Norfolk Intl altimeter setting and increase all DA 36 feet and all MDA 40 feet; increase LNAV Cats C and D visibility ⅛ mile. Baro-VNAV NA when using Norfolk Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F). For inoperative MALSR, increase LNAV/VNAV all Cats visibility to ⅞ mile.

MALSR

MISSED APPROACH: Climb to 500 then climbing left turn to 2300 direct NALDE and hold.

AWOS-3	NORFOLK APP CON	GCO	UNICOM
123.675	118.9 353.7	135.075	123.075 (CTAF) L

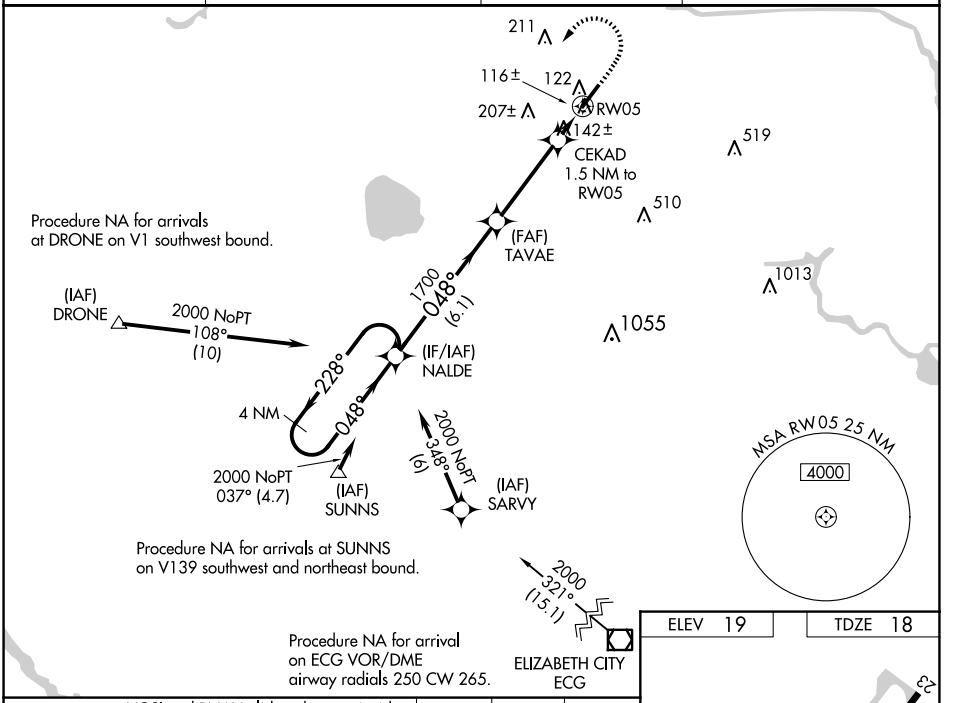

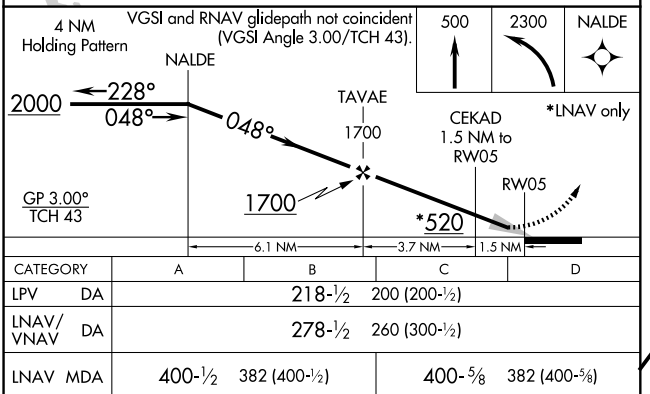

CATEGORY	A	B	C	D
LPV DA	218-½ 200 (200-½)			
LNAV/VNAV DA	278-½ 260 (300-½)			
LNAV MDA	400-½ 382 (400-½)		400-⅝ 382 (400-⅝)	
CIRCLING	460-1 441 (500-1)	480-1 461 (500-1)	520-1½ 501 (600-1½)	580-2 561 (600-2)

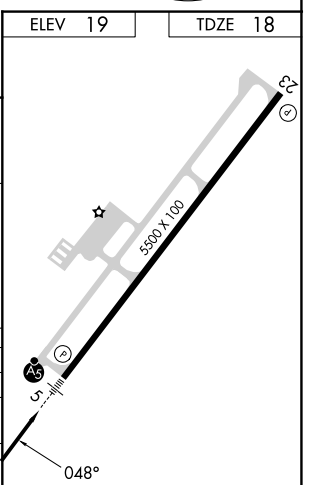

NE-3, 23 JAN 2025 to 20 FEB 2025
NE-3, 23 JAN 2025 to 20 FEB 2025