WAAS	APP CRS	Rwy Idg	4600
CH 73022	327°	TDZE	1145
W32A		Apt Elev	1145

RNAV (GPS) RWY 32

NORTHWEST MISSOURI RGNL (EVU)

RNP APCH - GPS.

T A NA Circling NA east of Rwy 14-32. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. Rwy 32 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use St. Joseph altimeter setting: increase LPV DA to 1520 feet, LNAV/VNAV DA to 1653 feet and LNAV/VNAV visibility all Cats ¼ SM; increase all MDAs 140 feet and LNAV visibility Cat C ⅜ SM. Baro-VNAV and VDP NA when using St. Joseph altimeter setting.

MISSED APPROACH: Climb to 5000 direct PWALK and hold, continue climb-in-hold to 5000.

AWOS-3PT	MINNEAPOLIS CENTER	UNICOM
118.225	119.6 290.4	122.8 (CTAF) L

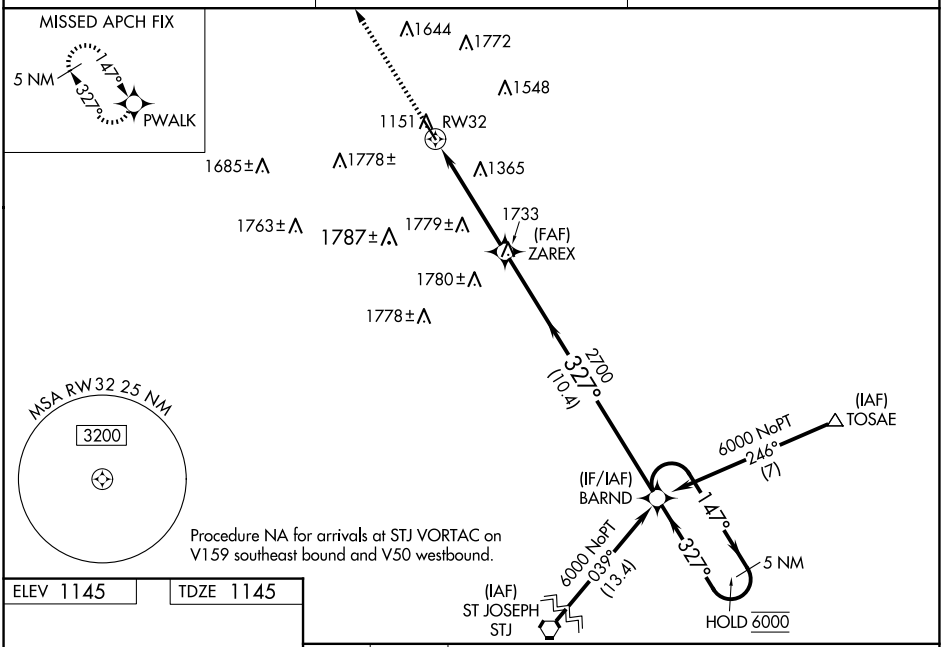

ELEV 1145 TDZ 1145

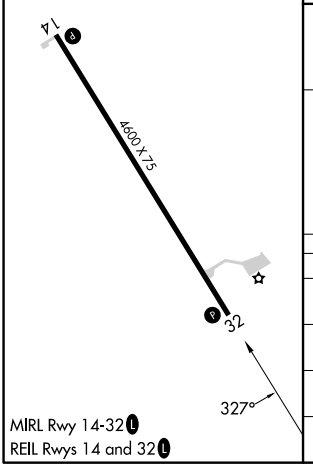

MIRL Rwy 14-32 L
REIL Rwys 14 and 32 L

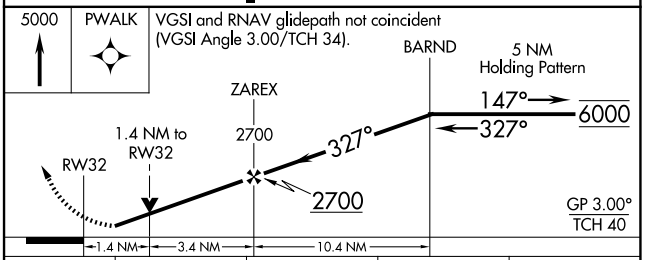

CATEGORY	A	B	C	D
LPV DA	1395-1 250 (300-1)			NA
LNAV/VNAV DA	1528-1⅛ 383 (400-1⅛)			NA
LNAV MDA	1620-1 475 (500-1)		1620-1⅜ 475 (500-1⅜)	NA
CIRCLING	1620-1 475 (500-1)		2120-3 975 (1000-3)	NA

NC-3, 23 JAN 2025 to 20 FEB 2025
NC-3, 23 JAN 2025 to 20 FEB 2025