

WAAS
CH **45709**
W06A

APP CRS
060°

Rwy Idg
TDZE **526**
Apt Elev **526**

RNAV (GPS) RWY 6

HENDERSON/OXFORD (HNZ)

RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.

When local altimeter setting not received, use Roxboro altimeter setting: increase all DA to 875 feet and all visibilities 1/8 SM; increase all MDA 80 feet and visibility Cats C and D 1/4 SM. Baro-VNAV and VDP NA when using Roxboro altimeter setting.

Rwy 6 helicopter visibility reduction below 3/4 SM NA.

MISSED APPROACH: Climb to 3000 direct VEKUC and hold.

AWOS-3 118.625	RALEIGH APP CON 132.35 256.9	UNICOM 122.8(CTAF) 0
--------------------------	--	--------------------------------

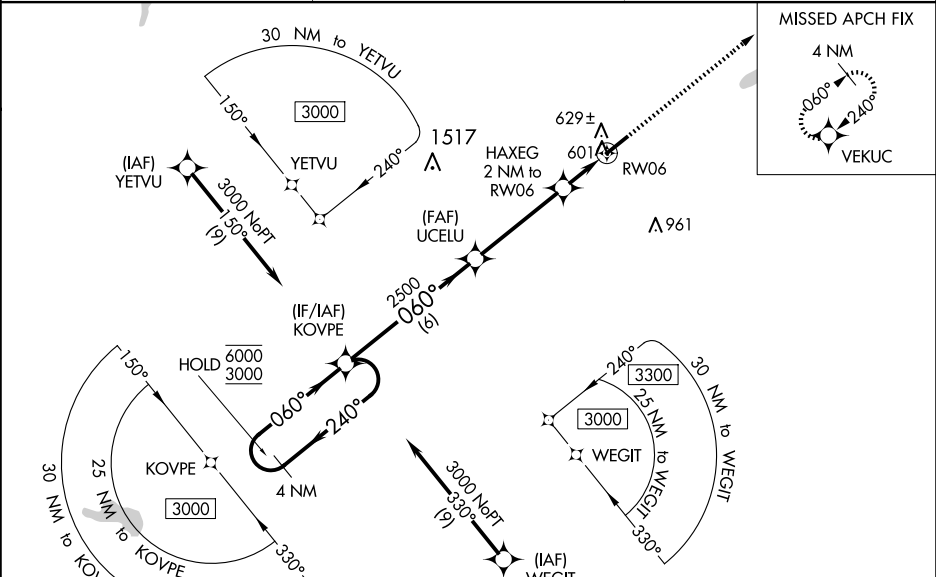

4 NM Holding Pattern

VGSI and RNAV glidepath not coincident (VGSI Angle 3.25/TCH 43).

GP 3.00° TCH 53

KOVPE

UCELU

HAXEG

RW06

6000

3000

2500

1200

240°

060°

060°

240°

6 NM

4 NM

1.1 NM

0.9 NM

CATEGORY	A	B	C	D
LPV DA	811-7/8	285 (300-7/8)		
LNAV/VNAV DA	810-7/8	284 (300-7/8)		
LNAV MDA	880-1	354 (400-1)		
CIRCLING	960-1 434 (500-1)	980-1 454 (500-1)	1100-1 1/2 574 (600-1 1/2)	1280-2 1/2 754 (800-2 1/2)

ELEV 526

TDZE 526

REIL Rwy 6 0

MIRL Rwy 6-24 0