

LOC I-JVY	APP CRS	Rwy Idg	7000
111.7	182°	TDZE	478
		Apt Elev	478

ILS or LOC RWY 18

CLARK RGNL (JVY)

ADF required. RADAR required for procedure entry.

▼

▲ NA

Circling NA for Cat D southwest of Rws 14 and 36. Circling Rwy 14, 32 NA at night.


For inop ALS, increase S-LOC 18 Cats C and D visibility to 1 3⁄8 SM. When local altimeter setting not recieved, use Louisville Muhammad Ali Intl altimeter setting: increase DA to 708; increase all MDAs 40 feet, S-LOC 18 Cats C and D visibility 1⁄8 SM and Circling Cat C visibility 1⁄4 SM.


MALS

AS

MISSED APPROACH:
Climb to 1500 then climbing left turn to 2500 direct CATCH LOM and hold.

AWOS-3	LOUISVILLE APP CON	CLNC DEL	UNICOM
118.575	132.075 327.0	118.05	122.7 (CTAF) 1

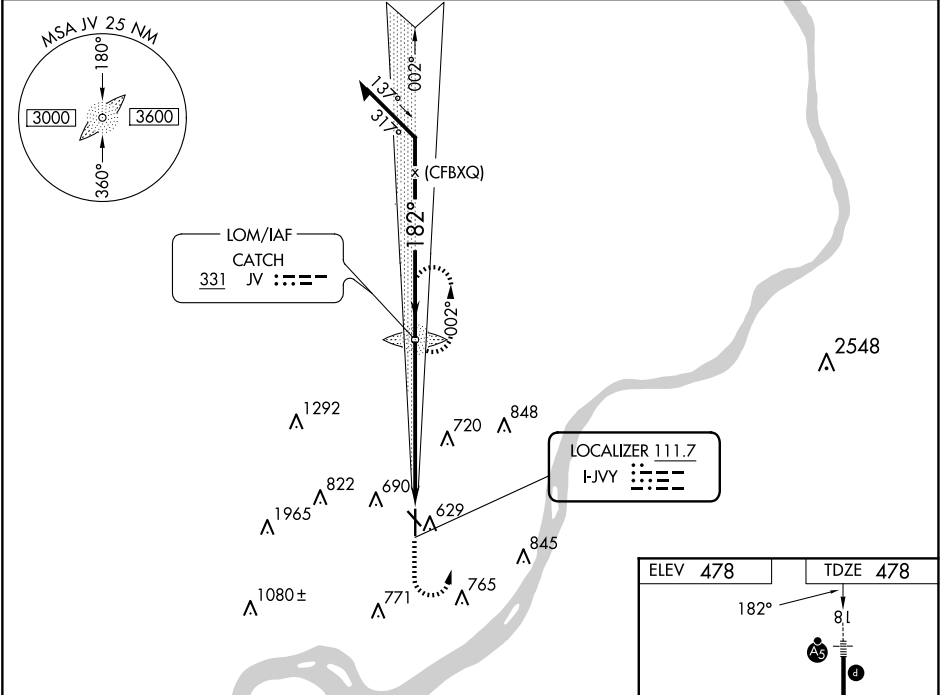

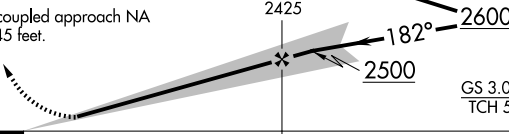1500	2500	JV		
				
Autopilot coupled approach NA below 1145 feet.				
				
CATEGORY	A	B	C	D
S-ILS 18	678-½		200 (200-½)	
S-LOC 18	980-½	502 (600-½)	980-1	502 (600-1)
 CIRCLING	1000-1 522 (600-1)	1040-1 562 (600-1)	1060-1½ 582 (600-1½)	1100-2 622 (700-2)

