

WAAS	APP CRS	Rwy Idg	3396
CH 97540	238°	TDZE	575
W24A		Apt Elev	575

RNAV (GPS) RWY 24

PAGELAND (PYG)


⚠

⚠ NA

Baro-VNAV NA. Rwy 24 helicopter visibility reduction below ¾ SM NA. DME/DME RNP-0.3 NA. Use Charlotte/Monroe Exec altimeter setting. When Charlotte/Monroe Exec altimeter not received, use Charlotte/Douglas Intl altimeter setting and increase LPV DA to 944 feet and all visibilities ¼ SM. Increase LNAV/VNAV DA to 986 feet and all visibilities ½ SM. Increase all MDA 60 feet.

MISSED APPROACH:
Climb to 2400 direct WITHE and hold.

EQY ASOS 135.775	CHARLOTTE APP CON 120.05 307.8	(CTAF) 122.9
---------------------	-----------------------------------	-----------------

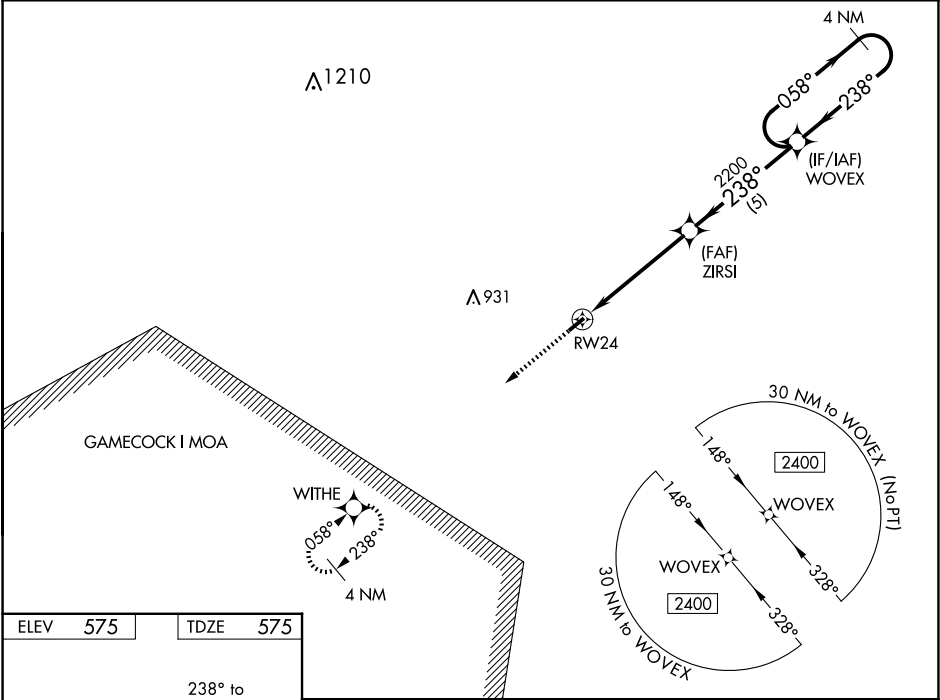

ELEV 575

TDZE 575

238° to RWY24

3396 x 60

0.7% UP

2400

WITHE

WITHE

2200

238°

2200

WOVEX

4 NM Holding Pattern

058°

238°

2400

GP 3.00°

TCH 40

CATEGORY	A	B	C	D
LPV DA	890-1	315 (400-1)	NA	
LNAV/VNAV DA	932-1¼	357 (400-1¼)	NA	
LNAV MDA	1040-1	465 (500-1)	NA	
CIRCLING	1100-1	525 (600-1)	NA	