
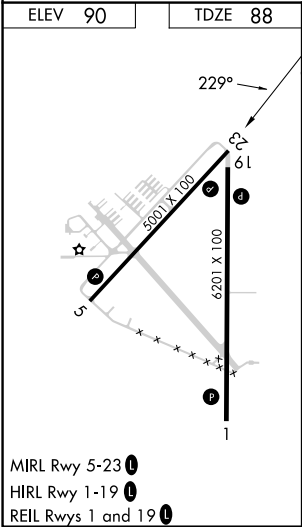


WAAS CH 45538 W23A	APP CRS 229°	Rwy Idg 5001 TDZE 88 Apt Elev 90
--	------------------------	---

RNAV (GPS) RWY 23
ZEPHYRHILLS MUNI (ZPH)

RNP APCH. Baro-VNAV and VDP NA when using Tampa Exec altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Rwy 23 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Tampa Exec altimeter setting and increase all DA 48 feet and all MDA 60 feet. Increase LPV and LNAV/VNAV all Cats, LNAV and Circling Cat C/D visibility ¼ mile.		MISSED APPROACH: Climb to 2000 direct BRUNT and hold.
---	--	---

AWOS-3PT 118.975	TAMPA APP CON 119.9 290.3	UNICOM 123.075 (CTAF)
----------------------------	-------------------------------------	---------------------------------

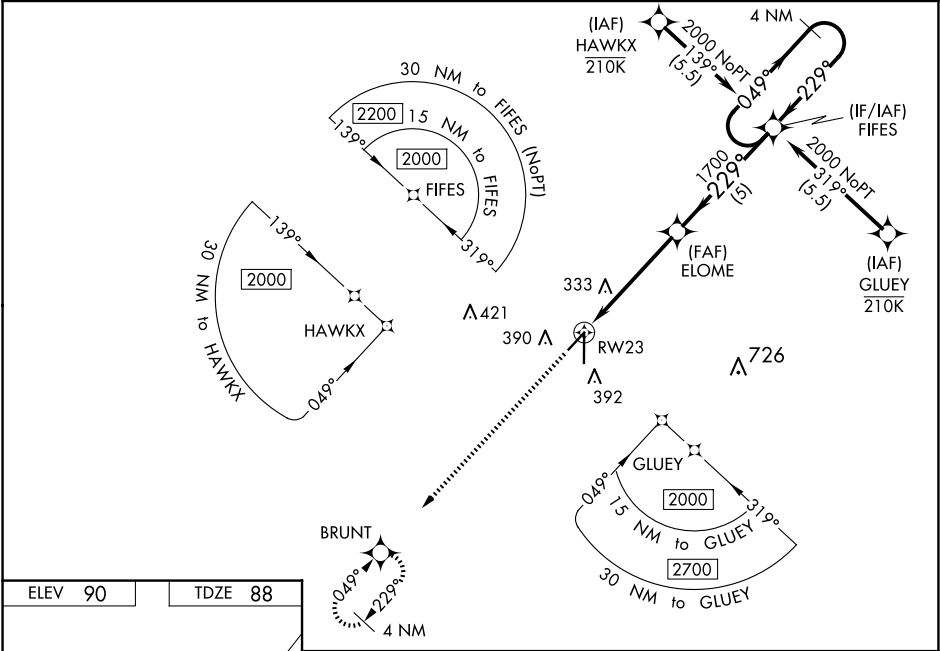

ELEV 90 TDZE 88		2000 BRUNT VGSI and RNAV glidepath not coincident (VGSI Angle 3.61/TCH 41).		4 NM Holding Pattern	
*LNAV only		ELOME 1700 229° 1700		FIFES 049° 2000 229°	
1.5 NM		3.4 NM		5 NM	
CATEGORY	A	B	C	D	
LPV DA		377-1	289 (300-1)		
LNAV/VNAV DA		409-1	321 (400-1)		
LNAV MDA	600-1	512 (600-1)	600-1 3/8	512 (600-1 3/8)	
CIRCLING	740-1	650 (700-1)	740-1 3/4 650 (700-1 3/4)	740-2 650 (700-2)	