

WAAS CH 42822 W24A	APP CRS 247°	Rwy Idg TDZE Apt Elev	5500 665 665
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 24



SANDUSKY COUNTY RGNL (S24)

RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Toledo Express altimeter setting. When local altimeter setting not received, use Toledo Express altimeter setting: increase LPV DA to 978 feet and all visibilities ¾ SM; increase LNAV/VNAV DA to 1196 feet and all visibilities ¾ SM; increase all MDA 100 feet and LNAV visibility Cat C and D ¼ SM and Circling visibility Cat C and D ½ SM.

MISSED APPROACH:
Climb to 3000 direct
ZUFIL and hold.

AWOS-3P 119.575	TOLEDO APP CON 126.1 307.0	UNICOM 123.05 (CTAF) 0
---------------------------	--------------------------------------	----------------------------------

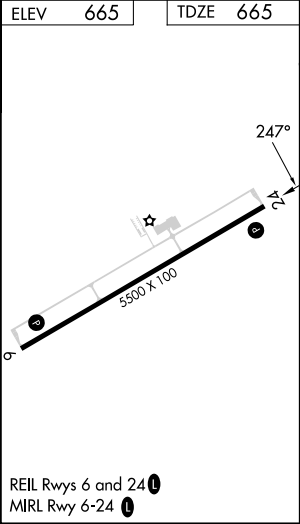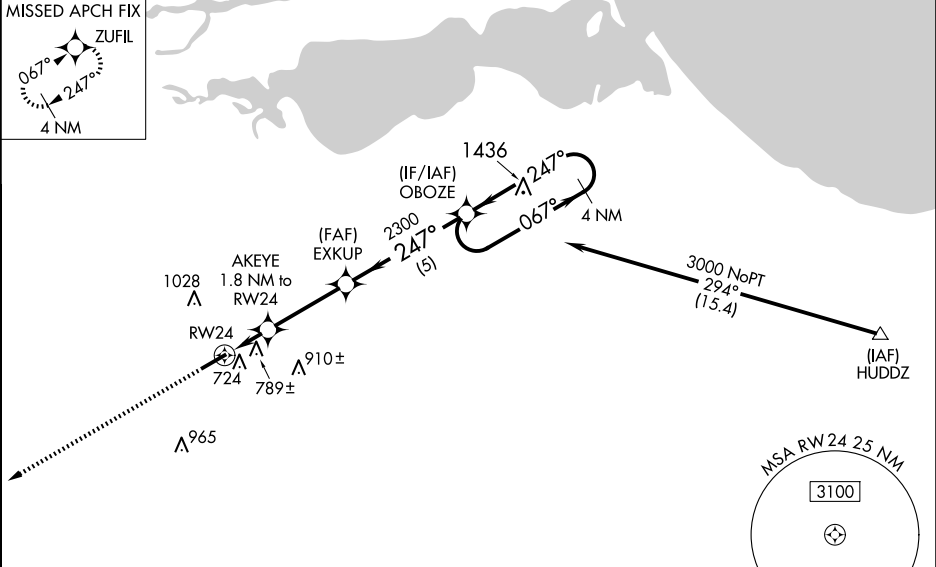

3000

↑

ZUFIL

4 NM

Holding Pattern

OBOZE

067° →

← 247°

3000

*LNAV only

AKEYE

1.8 NM to RW24

EXKUP

2300

247°

2300

GP 3.00°

TCH 42

*1.1 NM to RW24

RW24

*1260

1.1 NM

0.7 NM

3.2 NM

5 NM

CATEGORY	A	B	C	D
LPV DA	885-3¼ 220 (300-¾)			
LNAV/VNAV DA	1103-1½ 438 (500-1½)			
LNAV MDA	1040-1	375 (400-1)	1040-1⅛	375 (400-1⅛)
CIRCLING	1120-1 455 (500-1)	1160-1 495 (500-1)	1380-2 715 (800-2)	1380-2¼ 715 (800-2¼)