



WAAS CH 93911 W32A	APP CRS 323°	Rwy ldg 7140 TDZE 1302 Apt Elev 1302
--	------------------------	---

RNAV (GPS) RWY 32

BRANSON (BBG)

RNP APCH.	MALSF	MISSED APPROACH: Climb to 4000 direct WUTIB and hold.
When local altimeter setting not received, use Harrison altimeter setting: increase LPV DA to 1549 feet; increase LNAV/VNAV DA to 1804 feet and all visibilities ¼ SM; increase all MDAs 60 feet and visibility Cats C and D ½ SM. VDP and Baro-VNAV NA when using Harrison altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 46°C (114°F). Inop table does not apply.		

ATIS 124.625	SPRINGFIELD APP CON 126.35	BRANSON TOWER ★ 128.15 (CTAF) 0	GND CON 118.4	CLNC DEL 118.4	SPRINGFIELD CLNC DEL 126.35 (When tower closed)	UNICOM 122.95
------------------------	--------------------------------------	---	-------------------------	--------------------------	--	-------------------------

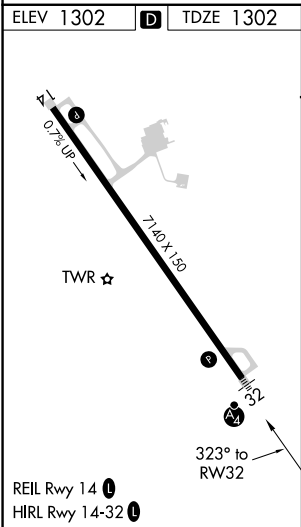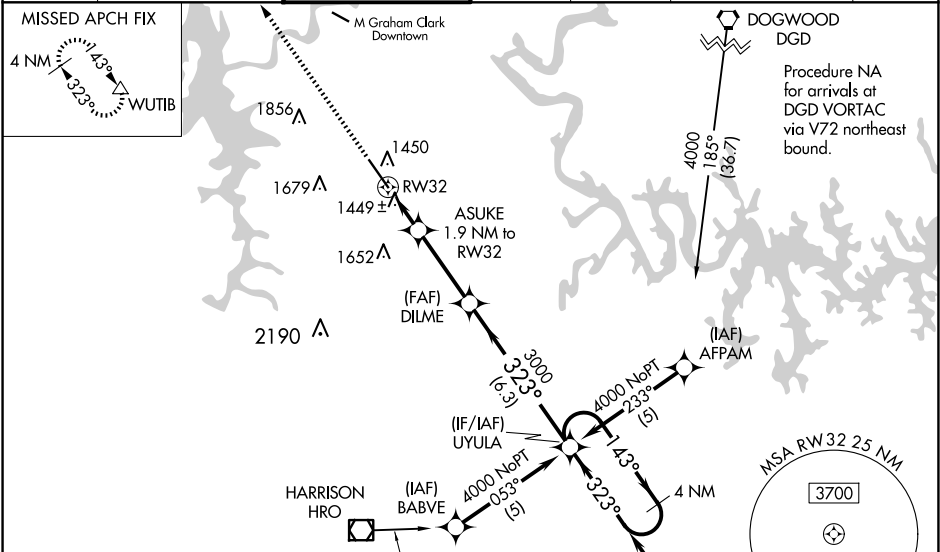

4000 086° (3.4)		4000 NoPT 323° (4.9) (IAF) CADAN			
4000 ↑	WUTIB △	4 NM Holding Pattern			
* LNAV only		ASUKE 1.9 NM to RW32	DILME 3000	UYULA	4000
* 1.1 NM to RW32		323°		143° →	← 323°
RW32 1.1 NM		1940*		GP 3.00° TCH 50	
0.8		3.2 NM		6.3 NM	
CATEGORY	A	B	C	D	
LPV DA	1502-1 200 (200-1)				
LNAV/ VNAV DA	1757-1½ 455 (500-1½)				
LNAV MDA	1700-1 398 (400-1)				1700-1¼ 398 (400-1¼)
CIRCLING	1760-1 458 (500-1)	1900-1 598 (600-1)	2220-2¾ 918 (1000-2¾)	2220-3 918 (1000-3)	

NC-3, 23 JAN 2025 to 20 FEB 2025

NC-3, 23 JAN 2025 to 20 FEB 2025