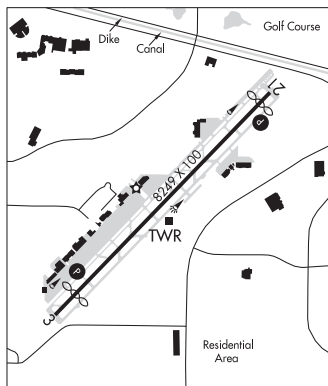


SCOTTSDALE (SDL)(KSDL) 9 N UTC-7 N33°37.37' W111°54.63'

1510 B TPA—See Remarks NOTAM FILE SDL

RWY 03-21: H8249X100 (ASPH) S-45, D-75, 2S-95 MIRL**RWY 03:** REIL. PAPI(P2L)—GA 4.0° TCH 59'. Thld dsplcd 740'. Tree. 0.7% up.**RWY 21:** REIL. PAPI(P2L)—GA 4.0° TCH 40'. Thld dsplcd 400'. Hill. Rgt tfc. 0.9% down.**RUNWAY DECLARED DISTANCE INFORMATION****RWY 03:** TORA-8249 TODA-8249 ASDA-7849 LDA-7110**RWY 21:** TORA-8249 TODA-8249 ASDA-8069 LDA-7669**SERVICE:** S4 FUEL 100LL, JET A1+ OX 1, 2, 3, 4 LGT When ATCT clsd ACTIVATE REIL Rwy 03 and Rwy 21; PAPI Rwy 03 and Rwy 21; MIRL Rwy 03-21—CTAF.**NOISE:** Voluntary noise abatement curfew 0500-1300Z; noise sensitive area all quads; noise abatement—480-312-8478. Maint runup NA 0500-1400Z.**AIRPORT REMARKS:** Attended continuously. Wildlife invof rwy. Mil arr 24 hr PPR—480-312-8478. Rwy 03-21 150 ft blast pad both ends. Ctc aviation director at 480-312-2321. Tran fee for acft 12,500 lbs or greater (based on max certificated ramp wgt). Tran over ngt parking fee. User fee arpt: Customs svcs avbl 1600Z to 0200Z; user fee must be prepaid online prior to arr. Rwy 03-21 midfield dep & stop & go Indg NA. TGL NA 0430-1300Z. Rwy 03 calm wind rwy. TPA-prop 2500(990); Jet 3000(1490); Helicopter 2000(490). D wgt thsd: cert max tkof wgt 7001-100,000 lb oprg abv 75,000 lb PPR—480-312-8478.**AIRPORT MANAGER:** 480-312-7735**WEATHER DATA SOURCES:** ASOS (480) 483-3049 ASOS bcsts on SDL ATIS freq (118.6) when SDL ATCT is clsd. LAWRS.**COMMUNICATIONS:** CTAF 119.9 ATIS 118.6**PHOENIX RCO 122.2 (PRESCOTT RADIO)**® **PHOENIX APP/DEP CON 120.7****TOWER 119.9 (1300-0400Z†) GND CON 121.6 CLNC DEL 124.8****CLEARANCE DELIVERY PHONE:** For CD when ATCT clsd, ctc Phoenix Apch at 602-306-2565.**PHOENIX****H-4J, L-5B, A****IAP, AD****CONTINUED ON NEXT PAGE**

CONTINUED FROM PRECEDING PAGE

AIRSPACE: CLASS D svc 1300-0400Z; other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE PRC.

PHOENIX (VH) (H) VORTACW 115.6 PXR Chan 103 N33°25.98' W111°58.21' 003° 11.8 NM to fld. 1184/12E.

VOR unusable:

000°-015° byd 33 NM blo 11,000'
 015°-034° byd 33 NM blo 10,000'
 015°-034° byd 60 NM blo 11,000'
 015°-034° byd 66 NM blo 16,000'
 035°-060° byd 40 NM blo 13,000'
 061°-067° byd 40 NM
 068°-088° byd 40 NM blo 14,000'
 068°-088° byd 60 NM
 090°-100° byd 15 NM blo 8,000'
 090°-117° byd 40 NM
 118°-141° byd 40 NM blo 9,000'
 118°-141° byd 65 NM blo 10,000'
 118°-141° byd 73 NM
 185°-190° byd 30 NM blo 8,000'
 185°-190° byd 38 NM blo 9,000'
 190°-230° byd 20 NM blo 10,000'
 231°-282° byd 40 NM
 318°-320° byd 40 NM
 323°-350° byd 40 NM blo 14,000'
 345°-000° byd 33 NM blo 10,000'
 345°-034° byd 10 NM blo 6,000'

TACAN AZIMUTH unusable:

000°-015° byd 33 NM blo 11,000'
 015°-034° byd 33 NM blo 10,000'
 090°-100° byd 15 NM blo 8,000'
 185°-190° byd 30 NM blo 8,000'
 185°-190° byd 38 NM blo 9,000'
 190°-230° byd 20 NM blo 10,000'
 345°-000° byd 33 NM blo 11,000'
 345°-034° byd 10 NM blo 6,000'
 345°-034° byd 20 NM blo 8,000'

DME unusable:

000°-015° byd 33 NM blo 11,000'
 015°-034° byd 33 NM blo 10,000'
 090°-100° byd 15 NM blo 8,000'
 185°-190° byd 30 NM blo 8,000'
 185°-190° byd 38 NM blo 9,000'
 190°-230° byd 20 NM blo 10,000'
 215°-315°
 345°-000° byd 33 NM blo 11,000'
 345°-034° byd 10 NM blo 6,000'
 345°-034° byd 20 NM blo 8,000'

VOR unusable:

345°-034° byd 20 NM blo 8,000'
 351°-359° byd 40 NM blo 12,000'

COMM/NAV/WEATHER REMARKS: Emerg frequency 121.5 not avbl at twr.