

APP CRS	Rwy Idg	10302
016°	TDZE	1314
	Apt Elev	1333

RNAV (RNP) Z RWY 1L
WICHITA DWIGHT D EISENHOWER NTL (ICT)

RNP AR APCH

▼ Simultaneous approach authorized. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For uncompensated Baro-VNAV systems, procedure NA below -15°C or above 54°C. For inop ALS, increase RNP 0.15 all Cats visibility to RVR 4500 and RNP 0.30 all Cats visibility to RVR 5500.

ALSF-2




MISSED APPROACH:
Climb to 4200 on track 016°
to ACUBO and hold.

ATIS
125.15

WICHITA APP CON
126.7 353.5


WICHITA TOWER
118.2 257.8

GND CON
121.9 348.6

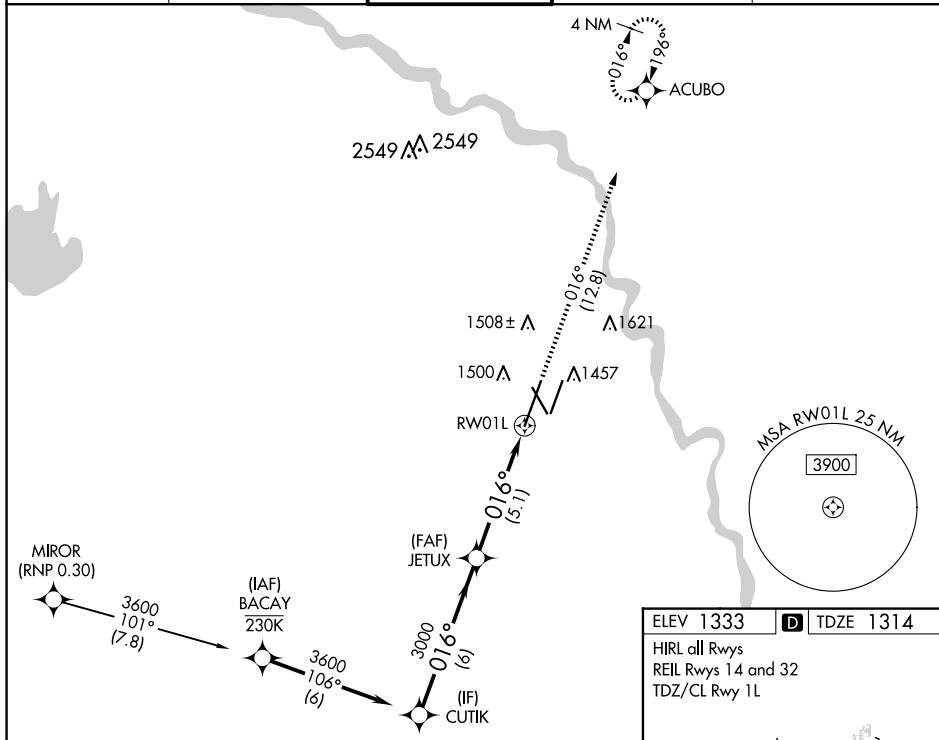CLNC DEL
125.7

ELEV 1333	D	TDZE 1314
-----------	----------	-----------

HIRL all Rwy
REIL Rwy 14 and 32
TDZ/CL Rwy 1L

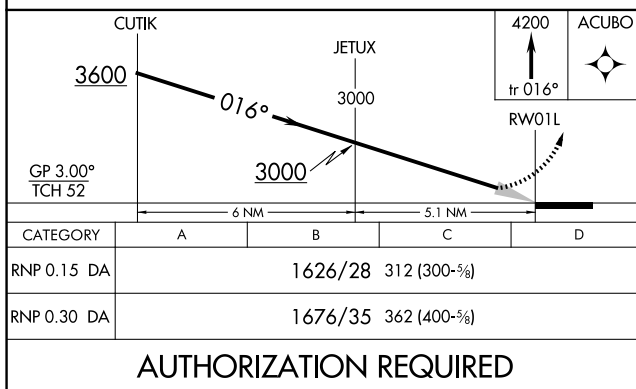

AUTHORIZATION REQUIRED

WICHITA, KANSAS

Orig-D 22APR21

WICHITA DWIGHT D EISENHOWER NTL (ICT)

37°39'N-97°26'W

RNAV (RNP) Z RWY 1L