

|                                        |                        |                                                     |
|----------------------------------------|------------------------|-----------------------------------------------------|
| WAAS<br>CH <b>70331</b><br><b>W35A</b> | APP CRS<br><b>352°</b> | Rwy ldg<br>TDZE <b>2426</b><br>Apt Elev <b>2430</b> |
|----------------------------------------|------------------------|-----------------------------------------------------|


RNAV (GPS) RWY 35  
WINSTON FLD (SNK)

RNP APCH-GPS

Baro-VNAV NA when using Sweetwater altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -19°C or above 54°C. VDP NA with Sweetwater altimeter setting. When local altimeter setting not received, use Sweetwater altimeter setting and increase LPV DA to 2698 and all visibilities ½ SM; increase LNAV/VNAV DA to 2748 and all visibilities ¾ SM; increase all MDAs 80 feet and LNAV and Circling visibility Cat C ¼ SM. Circling NA to Rwy 8 and 26. Circling Rwy 17 NA at night.

MISSED APPROACH:  
Climb to 5000 direct VARVY and on track 027° to WABVI and hold, continue climb-in-hold to 6000.

|                          |                                          |                               |
|--------------------------|------------------------------------------|-------------------------------|
| AWOS-3<br><b>119.925</b> | FORT WORTH CENTER<br><b>127.45 290.3</b> | UNICOM<br><b>122.8 (CTAF)</b> |
|--------------------------|------------------------------------------|-------------------------------|

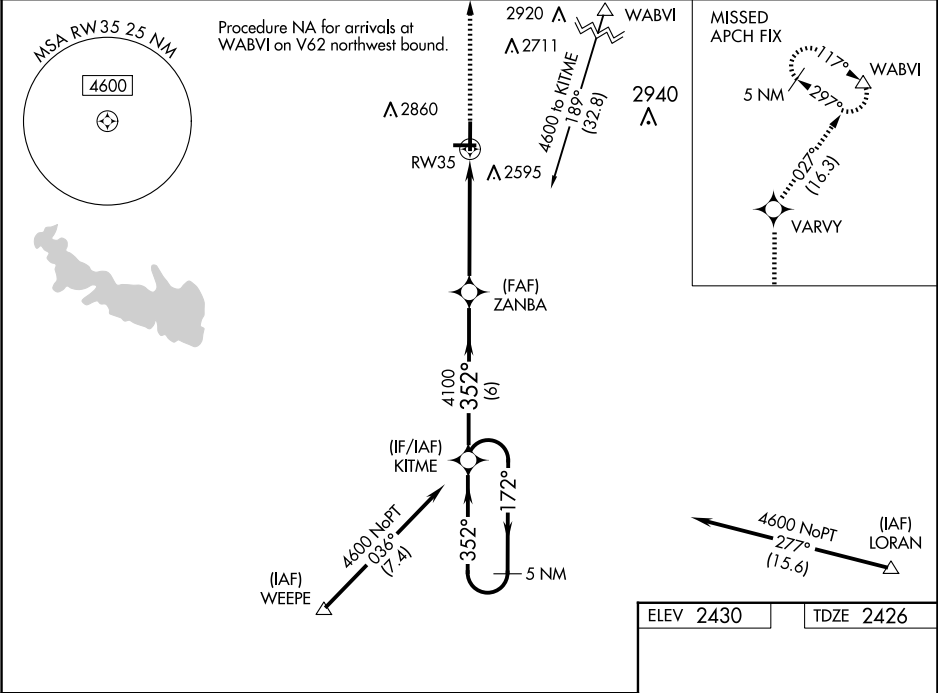

|                                                                  |        |                    |                      |    |
|------------------------------------------------------------------|--------|--------------------|----------------------|----|
| VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 40). |        |                    |                      |    |
| 5 NM Holding Pattern KITME                                       |        |                    |                      |    |
| 4600 ← 172° → 352° → 352° → 4100                                 |        |                    |                      |    |
| GP 3.00° TCH 45                                                  |        |                    |                      |    |
| 6 NM 4.1 NM 1 NM                                                 |        |                    |                      |    |
| CATEGORY                                                         | A      | B                  | C                    | D  |
| LPV DA                                                           |        | 2626-¾             | 200 (200-¾)          | NA |
| LNAV/VNAV DA                                                     |        | 2676-¾ 250 (300-¾) |                      | NA |
| LNAV MDA                                                         |        | 2780-1 354 (400-1) |                      | NA |
| CIRCLING                                                         | 2940-1 | 510 (600-1)        | 3220-2¼ 790 (800-2¼) | NA |

