

APP CRS
173°

Rwy Idg
TDZE
Apt Elev

4001
1551
1551

RNAV (GPS) RWY 17

WATONGA RGNL (JWG)

RNP APCH - GPS.

▼

When local altimeter setting not received, use Clinton altimeter setting and increase all

▲ NA


MDA 100 feet; increase LNAV Cat C visibility $\frac{3}{8}$ SM and Circling Cat C visibility $\frac{1}{4}$ SM.

MISSED APPROACH: Climbing left turn to 4000 direct ASEHU and hold.

AWOS-3
134.175

VANCE APP CON ★
126.75 346.325

UNICOM
122.8 (CTAF) 0

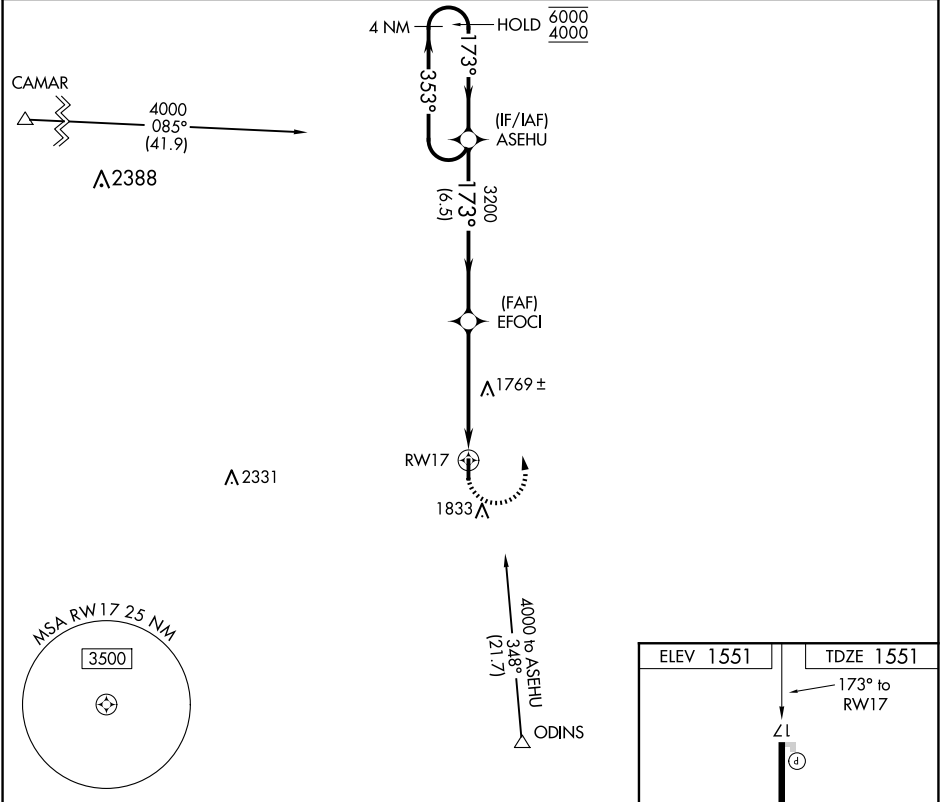

4 NM Holding Pattern ASEHU

6000 ← 353°

4000 → 173°

173°

EFOCI

3200

3.04° TCH 40

RWY 17

6.5 NM

5 NM

4000 ASEHU

4001 X 60

0.5% UP

35

173° to RWY 17

348°

4000 to ASEHU (21.7°)

ODINS

CATEGORY	A	B	C	D
LNAV MDA	2060-1	509 (600-1)	2060-1 $\frac{3}{8}$ 509 (600-1 $\frac{3}{8}$)	NA
CIRCLING	2060-1 509 (600-1)	2240-1 689 (700-1)	2240-2 689 (700-2)	NA

MIRL Rwy 17-35 0