

WAAS
CH 81923
W18A

APP CRS
174°

Rwy Idg 5001
TDZE 1177
Apt Elev 1193


RNAV (GPS) RWY 18
SUNDANCE (HSD)

⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Wiley Post altimeter setting. DME/DME RNP-0.3 NA. Circling Rwy 36 NA at night.

MISSED APPROACH:
Climb to 3200 direct NUFAD and hold.

AWOS-3 120.975	OKE CITY APP CON 124.6 266.8	CLNC DEL 123.7	UNICOM 122.7 (CTAF) 0
-------------------	---------------------------------	-------------------	--------------------------

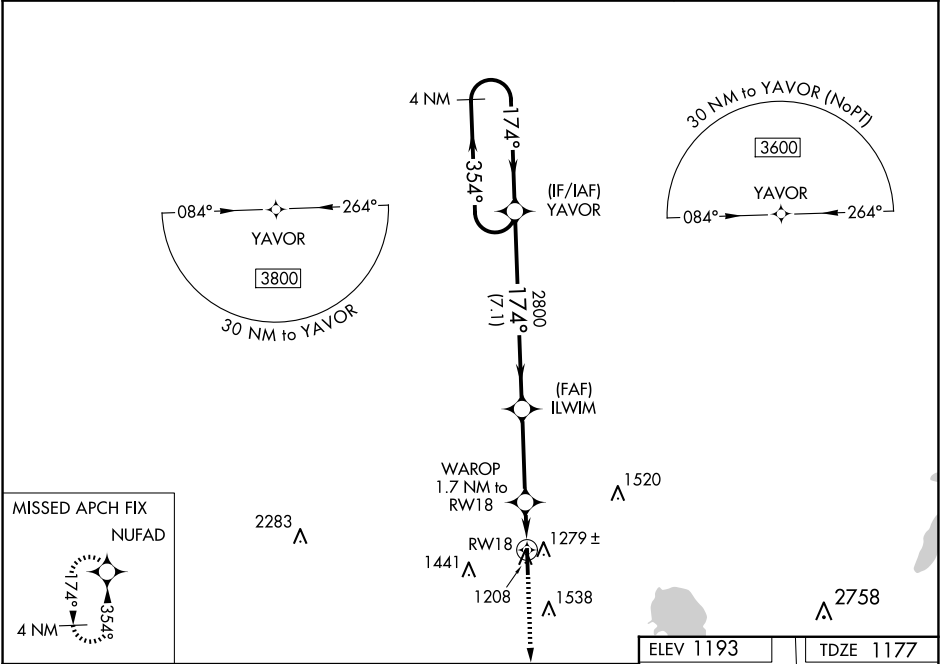

4 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 30).		3200 NUFAD	
3600		ILWIM 2800		WAROP 1.7 NM to RW18	
GP 3.00° TCH 40		*1720		*1.1 NM to RW18	
7.1 NM		3.4 NM		0.6	
CATEGORY	A	B	C	D	
LPV DA	1427-1	250 (300-1)		NA	
LNAV/VNAV DA	1473-1½	296 (300-1½)		NA	
LNAV MDA	1540-1	363 (400-1)	1540-1½ 363 (400-1½)	NA	
CIRCLING	1740-1 547 (600-1)	1840-1 647 (700-1)	1840-1¾ 647 (700-1¾)	NA	

ELEV 1193

TDZE 1177

174° to RW18

81

0.8% UP

5001 X 100

36

MIRL Rwy 18-36 0