

LOC I-MZX
111.75

APP CRS
172°

Rwy Idg **8001**
TDZE **146**
Apt Elev **146**

ILS or LOC RWY 17

AUGUSTA RGNL AT BUSH FLD (AGS)

ADF required for LOC only.

▽

▲


For inop ALS, increase S-LOC 17 Cats C and D visibility to 1½ SM.

MALS R

AS

MISSED APPROACH: Climb to 3000 on heading 180° and IRQ VORTAC R-164 to SHELLY INT and hold.

ATIS 132.75	AUGUSTA APP CON ★ 126.8 270.3	AUGUSTA TOWER ★ 118.7 (CTAF) 0 239.3	GND CON 121.9 348.6	CLNC DEL 118.65	UNICOM 122.95
-----------------------	---	--	-------------------------------	---------------------------	-------------------------

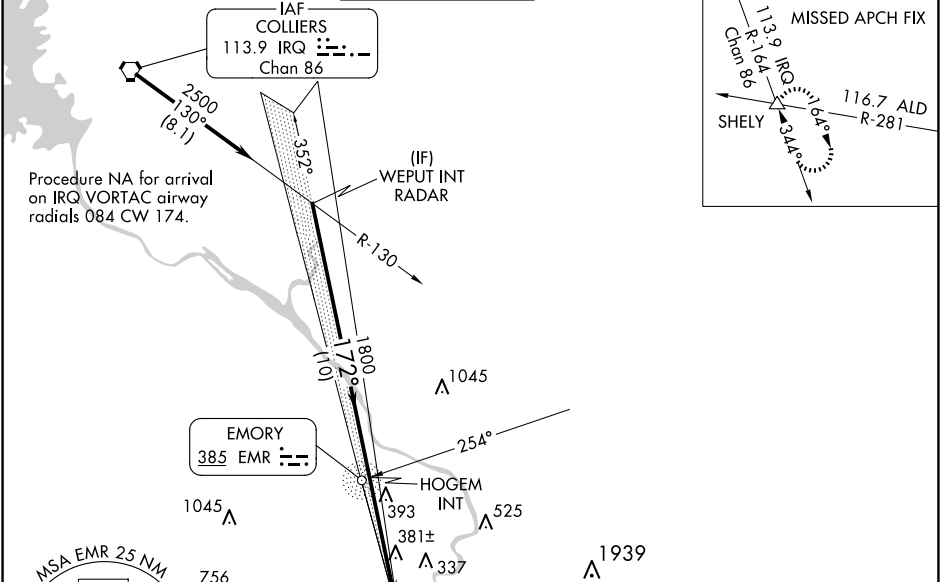

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 71).

WEPUT INT RADAR

GS 3.00° TCH 57

10 NM

5 NM

3000

hdg 180°

IRQ R-164

SHELLY △

LOCALIZER 111.75

I-MZX

	ELEV 146		TDZE 146	
	172°		180°	
	2500		1800	
	10 NM		5 NM	
CATEGORY	A	B	C	D
S-ILS 17	351/24		205 (300-½)	
S-LOC 17	640/24	494 (500-½)	640/50	494 (500-1)
CIRCLING	780-1	634 (700-1)	780-1¾ 634 (700-1¾)	940-2½ 794 (800-2½)
FAF to MAP 5 NM				
Knots 60 90 120 150 180				
Min:Sec 5:00 3:20 2:30 2:00 1:40				