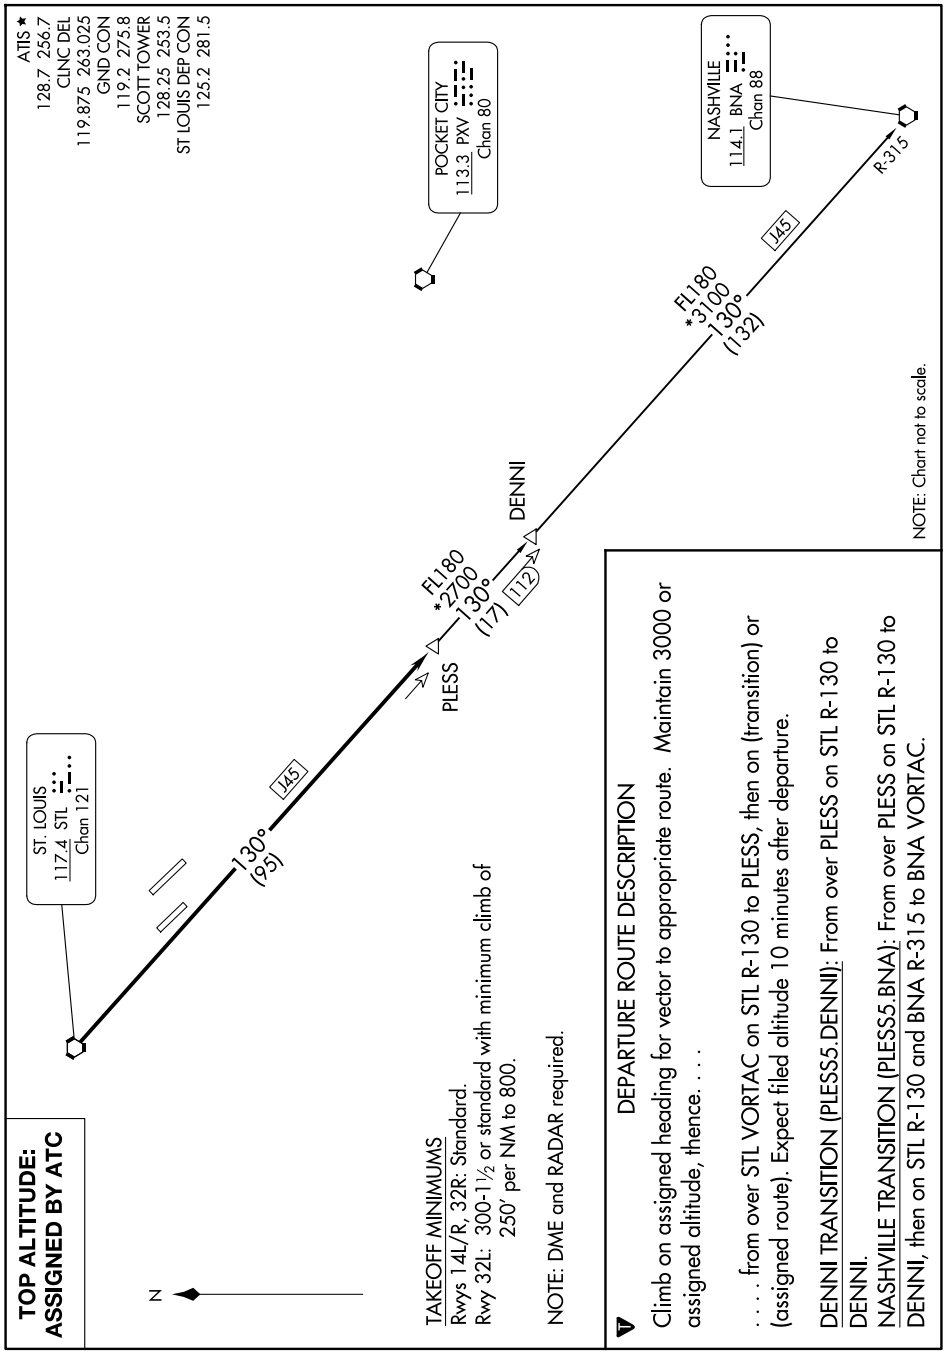
ATIS ★
128.7 256.7
CLNC DEL
119.875 263.025
GND CON
119.2 275.8
SCOTT TOWER
128.25 253.5
ST LOUIS DEP CON
125.2 281.5
POCKET CITY
113.3 PXV
Chan 80
NASHVILLE
114.1 BNA
Chan 88
R-315
J45
FL180
*3100
130°
(132)
DENNI
FL180
*2700
130°
(17)
112
PLESS
J45
130°
(95)
ST. LOUIS
117.4 STL
Chan 121
N
TOP ALTITUDE:
ASSIGNED BY ATC
TAKEOFF MINIMUMS
Rwys 14L/R, 32R: Standard.
Rwy 32L: 300-1½ or standard with minimum climb of 250′ per NM to 800.
NOTE: DME and RADAR required.
DEPARTURE ROUTE DESCRIPTION
Climb on assigned heading for vector to appropriate route. Maintain 3000 or assigned altitude, thence. . . .
. . . . from over STL VORTAC on STL R-130 to PLESS, then on (transition) or (assigned route). Expect filed altitude 10 minutes after departure.
DENNI TRANSITION (PLESS5.DENNI): From over PLESS on STL R-130 to DENNI.
NASHVILLE TRANSITION (PLESS5.BNA): From over PLESS on STL R-130 to DENNI, then on STL R-130 and BNA R-315 to BNA VORTAC.
NOTE: Chart not to scale.