| WAAS CH 50518 W32A | APP CRS 319° | Rwy ldg 10000<br>TDZE 442<br>Apt Elev 459 |
|---|---|---|

# RNAV (GPS) RWY 32R
## SCOTT AFB/MIDAMERICA ST LOUIS (BLV)

RNP APCH - GPS.

ASR

For uncompensated Baro-VNAV systems, procedure NA below -18°C or above 54°C.
For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 5500.

MALSR

MISSED APPROACH: Climb to 2300 direct MADDT and right turn on track 078° to JIKMO and on track 145° to COFEY and hold.

| ATIS ★ | ST LOUIS APP CON | SCOTT TOWER | GND CON | CLNC DEL |
|---|---|---|---|---|
| 128.7 256.7 | 125.2 281.5 | 128.25 253.5 | 119.2 275.8 | 119.875 263.025 |

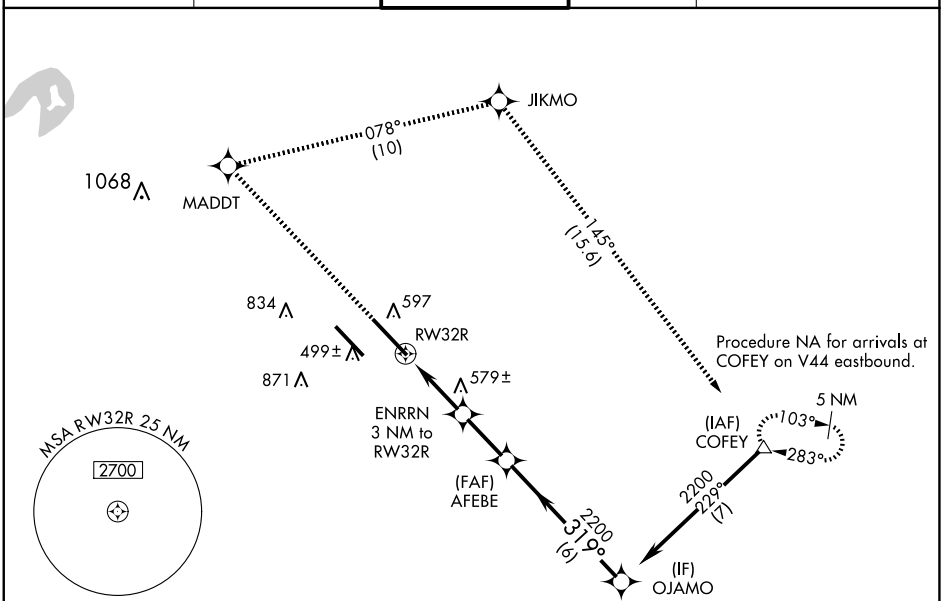


ELEV 459 | D | TDZE 442

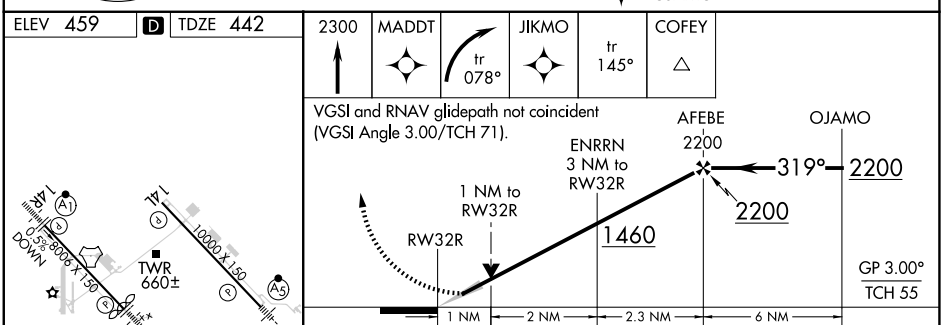

| CATEGORY | A | B | C | D |
|---|---|---|---|---|
| LPV DA | 642/24 200 (200-½) | | | |
| LNAV/VNAV DA | 804/35 362 (400-⅝) | | | |
| LNAV MDA | 840/24 398 (400-½) | | 840/35 398 (400-⅝) | |
| C CIRCLING | 1000-1 541 (600-1) | 1120-1 661 (700-1) | 1240-2¼ 781 (800-2¼) | 1240-2½ 781 (800-2½) |

REIL Rwy 14L
HIRL Rwys 14R-32L and 14L-32R



EC-3, 20 MAR 2025 to 17 APR 2025
EC-3, 20 MAR 2025 to 17 APR 2025