
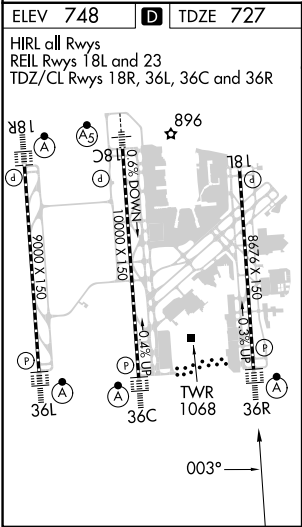


WAAS CH 90100 W36D	APP CRS 003°	Rwy Idg TDZE 727 Apt Elev 748
--	------------------------	---

RNAV (GPS) Y RWY 36R

CHARLOTTE/DOUGLAS INTL (CLT)

RNP APCH.				ALSF-2	MISSED APPROACH: Climb to 1320 then climbing right turn to 4000 direct LOCAS and hold.
Circling NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C or above 54°C. Simultaneous approach authorized. Use of FD or AP required during simultaneous operations. LNAV procedure NA during simultaneous operations. For inop ALSF, increase LNAV/VNAV all Cats visibility to 1½ mile.					
D-ATIS ARR 121.15 DEP 132.1	CHARLOTTE APP CON (001°-119°) 128.32 (120°-295°) 120.05 (296°-360°) 134.75	CHARLOTTE TOWER (Rwys 18L-36R) 118.1 257.8 (Rwy 18C-36C) 126.4 257.8 (Rwy 18R-36L) 133.35 257.8	GND CON 121.8 348.6 (WEST) 121.9 348.6 (EAST)	CLNC DEL 127.15 348.6	

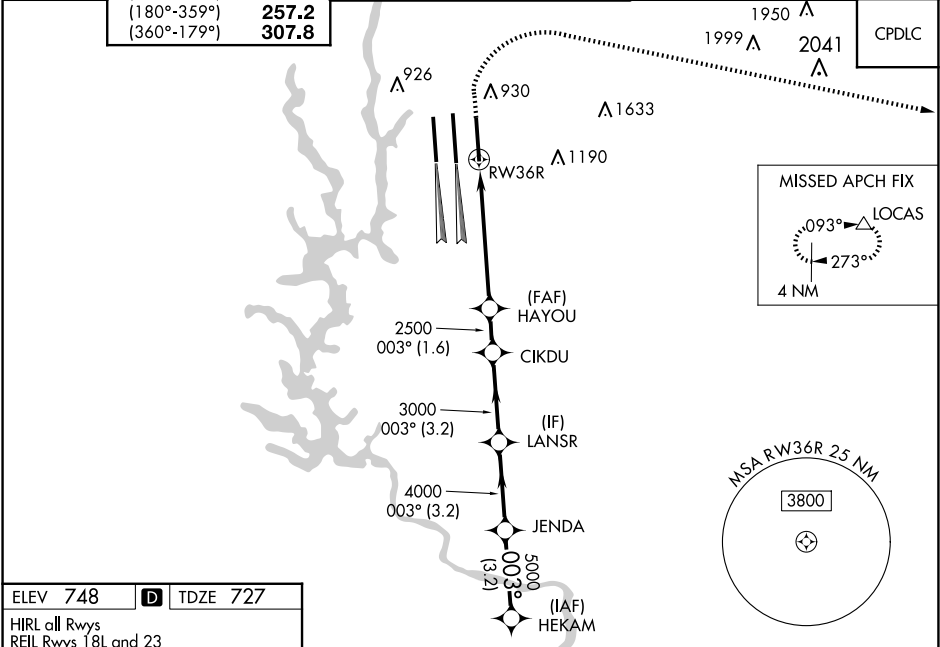

1320	4000	LOCAS	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 74).		HEKAM
*LNAV only.		JENDA		6000	
RW36R		HAYOU	CIKDU	LANSR	GP 3.00° TCH 55
1.6		3.8 NM	1.6 NM	3.2 NM	3.2 NM
CATEGORY	A	B	C	D	
LPV DA	927/18		200 (200-½)		
LNAV/VNAV DA	1229-1¼		502 (500-1¼)		
LNAV MDA	1320/24	593 (600-½)	1320-1¼	593 (600-1¼)	
CIRCLING	1380-1	632 (700-1)	1500-2¼	752 (800-2¼)	1500-2½