

WAAS CH 90148 W21A	APP CRS 205°	Rwy Idg 6101 TDZE 475 Apt Elev 482
--	------------------------	---

RNAV (GPS) RWY 21
CINCINNATI MUNI/LUNKEN FLD (LUK)

RNP APCH-GPS.


A Circling NA for Cat D north of Rwy 7-25. Circling Rwy 7 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. Rwy 21 helicopter visibility reduction below RVR 4000 NA. Inop table does not apply to LPV all Cats and LNAV Cat A and B visibility. For inop ALS, increase LNAV/VNAV all Cats and LNAV Cat C and D visibility to 1½ SM.

MALSR



MISSED APPROACH:
Climb to 2600 direct
WONAN and on track
130° to CALIF and hold.

ATIS 123.6	CINCINNATI APP CON 121.0 254.25	LUNKEN TOWER ★ 118.7 (CTAF) 0 257.8	GND CON 121.9	CLNC DEL 121.9	CLNC DEL 124.9 (When twr closed)	UNICOM 122.95
---------------	------------------------------------	--	------------------	-------------------	--	------------------

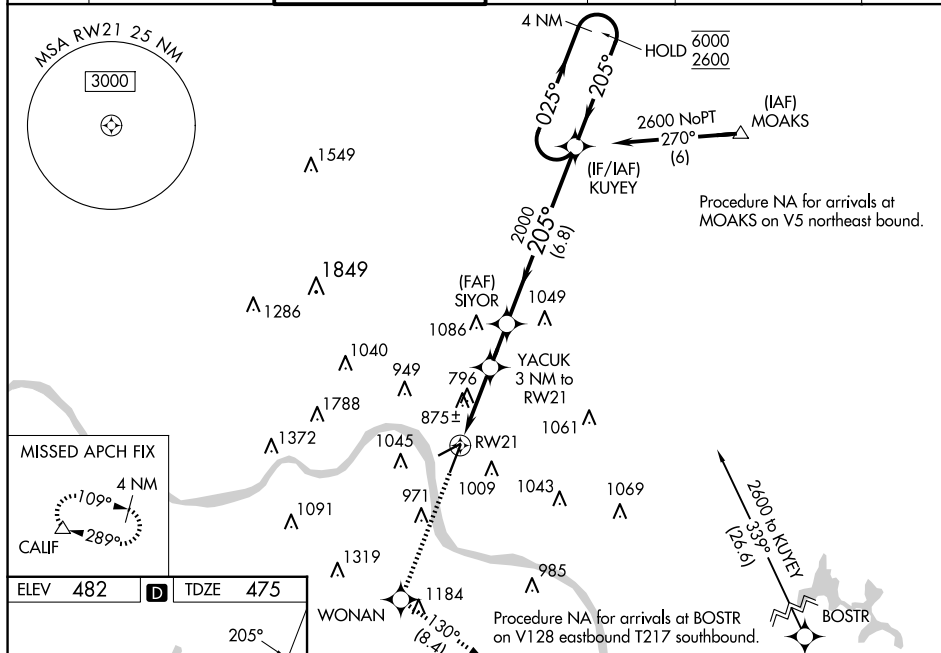

REIL Rwy 3
HIRL Rwy 3-21
MIRL Rwy 7-25

4 NM Holding Pattern

YACUK 2000
SIYOR 2000
KUYEY 2600

2 NM to RW21
1 NM
1.7 NM
6.8 NM

205°
025°

GP 3.00°
TCH 39°

CATEGORY	A	B	C	D
LPV DA	797/50	322 (400-1)		
LNAV/VNAV DA	1140-1½	665 (700-1½)		
LNAV MDA	1140/50	665 (700-1)	1140-1½	665 (700-1½)
CIRCLING	1260-1 778 (800-1)	1360-1¼ 878 (900-1¼)	1360-2½ 878 (900-2½)	1400-3 918 (1000-3)