

WAAS CH 62922 W27A	APP CRS 273°	Rwy Idg 8002 TDZE 8 Apt Elev 8
--	------------------------	---

RNAV (GPS) RWY 27R

MIAMI-OPA LOCKA EXEC (OPF)

RNP APCH - GPS.

T

A

Baro-VNAV NA when using Miami Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 5°C or above 54°C.
When local altimeter setting not received, use Miami Intl altimeter setting and increase all DA/MDA 20 feet and Circling Cat D visibility ¼ SM. For inop ALS, increase LPV all Cats visibility to ¾ SM, LNAV/VNAV all Cats to 1¾ SM, and LNAV Cats C and D visibility to 1¾ SM. Rwy 27R helicopter visibility reduction below ¾ SM NA.


MALS

A2


≡

MISSED APPROACH: Climb to 2000 direct SAZBO and on track 317° to BRBRA and hold.

ATIS 125.9	MIAMI APP CON 128.6 306.975	OPA LOCKA TOWER ★ 134.675 (CTAF) 0	GND CON 120.025	CLNC DEL 119.2	GCO 119.45
----------------------	---------------------------------------	--	---------------------------	--------------------------	----------------------

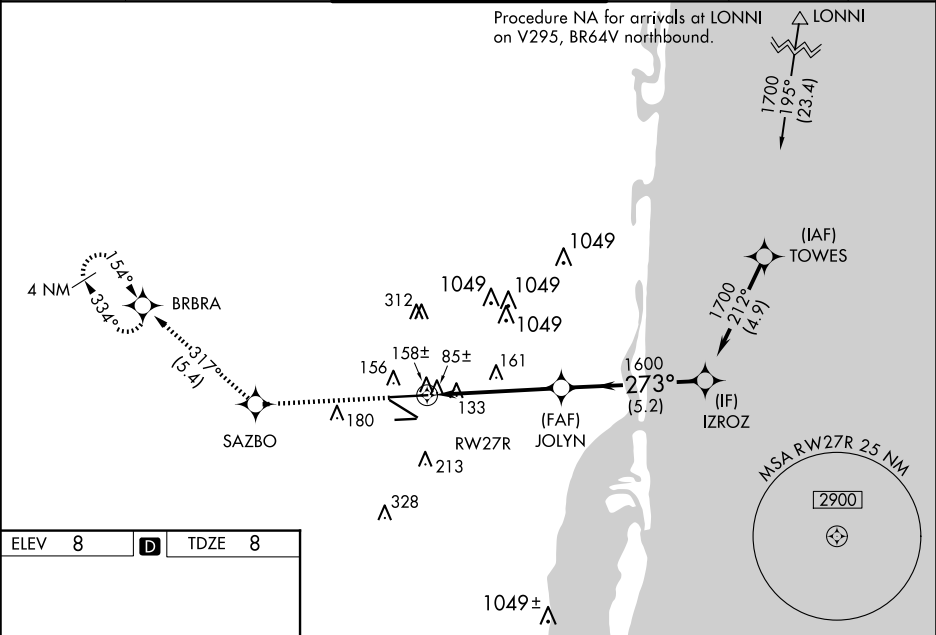

ELEV 8	D	TDZE 8
---------------	----------	---------------

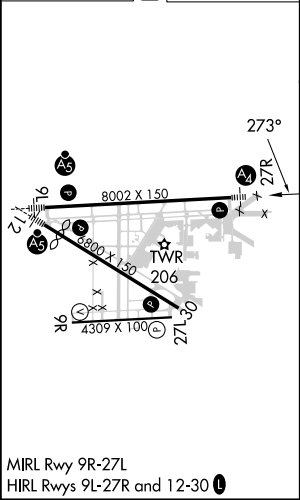

2000	SAZBO	tr 317°	BRBRA					
1.1 NM to RW27R				JOLYN	1600	273°	IZROZ	1700
				1600		GP 3.00° TCH 58		
1.1 NM				3.7 NM		5.2 NM		
CATEGORY	A		B		C		D	
LPV DA			291-¾		283 (300-¾)			
LNAV/ VNAV	DA		413-1		405 (500-1)			
LNAV MDA	420-¾		412 (500-¾)		420-1		412 (500-1)	
CIRCLING	540-1		532 (600-1)		620-1¾ 612 (700-1¾)		740-2¼ 732 (800-2¼)	