

RNAV (GPS) RWY 14

- (USN) PATUXENT RIVER NAS (TRAPNELL FLD) (KNHK)

APCH CRS 136°	Rwy Idg 9732 TDZE 27 Arpt Elev 39
------------------	--

RNP APCH

RADAR required




MISSED APPROACH: Climb to 600, then climbing left turn to 2500 direct SPRIG and hold.

ATIS 322.425	APP CON/DEP CON* 121.0 250.3	TOWER 123.7 343.65	GND CON 120.6 336.4	CLNC DEL 135.2 316.125	ASR/PAR
-----------------	---------------------------------	-----------------------	------------------------	---------------------------	---------

For uncompensated Baro-VNAV systems, Procedure NA below -15°C (5°F) or above 54°C (129°F).

CAUTION: WCH group 4 acft: 16 feet is less than minimum 20 feet.

MISSED APPROACH

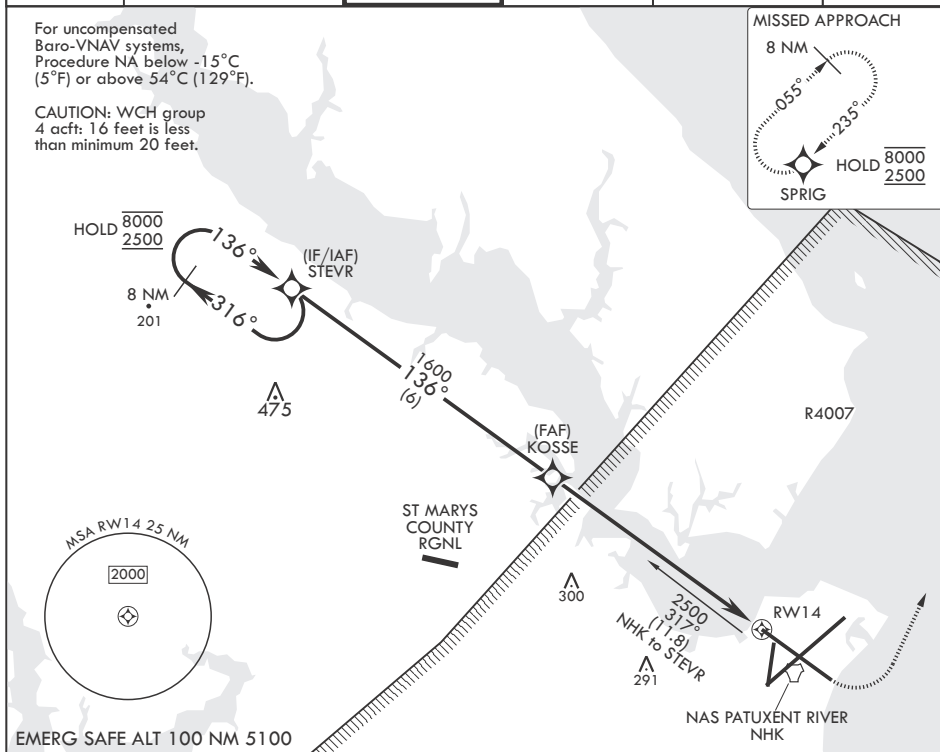

8 NM	
Holding Pattern	STEVR

$$\begin{array}{r} 8000 \\ 2500 \\ \hline \end{array}$$

$$\begin{array}{r} \text{GP } 3.00^\circ \\ \text{TCH } 41 \end{array}$$

GP 3.00°
TCH 41

CATEGORY	A	B	C	D	E
LNAV/VNAV DA	367-1 340 (400-1)	378-1 351 (400-1)	386-1 359 (400-1)	397-1	370 (400-1)
LNAV MDA	500-1	473 (500-1)	500-1%	473	(500-1%)
C CIRCLING	540-1 501 (600-1)	560-1 521 (600-1)	620-1½ 581 (600-1½)	680-2 641 (700-2)	820-2¾ 781 (800-2¾)

PATUXENT RIVER, MARYLAND

Amdt 3 07SEP23

38°17'N - 76°25'W PATUXENT RIVER NAS (TRAPNELL FLD) (KNHK)

RNAV (GPS) RWY 14

NE-3, 20 MAR 2025 to 17 APR 2025