

APP CRS	Rwy Idg	12000
087°	TDZE	21
	Apt Elev	36

RNAV (RNP) Z RWY 9R
PHILADELPHIA INTL (PHL)

RNP AR APCH - GPS.

T For uncompensated Baro-VNAV systems, procedure NA below -12°C or above 54°C. For inop ALS, increase RNP 0.16 all Cats visibility to RVR 4500 and RNP 0.30 all Cats visibility to 1½ SM.

ALSF-2



MISSED APPROACH: Climb to 3000 on track 087° to ASGEW and on track 169° to CIPOK, and on track 259° to OOD VORTAC and hold.

D-ATIS	
ARR	133.4
DEP	135.925


PHILADELPHIA APP CON
124.35 319.15

PHILADELPHIA TOWER	
118.5	327.05 (Rwys 9L/27R, 8/26 and 17/35)
135.1	327.05 (Rwy 9R/27L)

GND CON
121.9 348.6

CLNC DEL
18.85 348.6



CPDLC

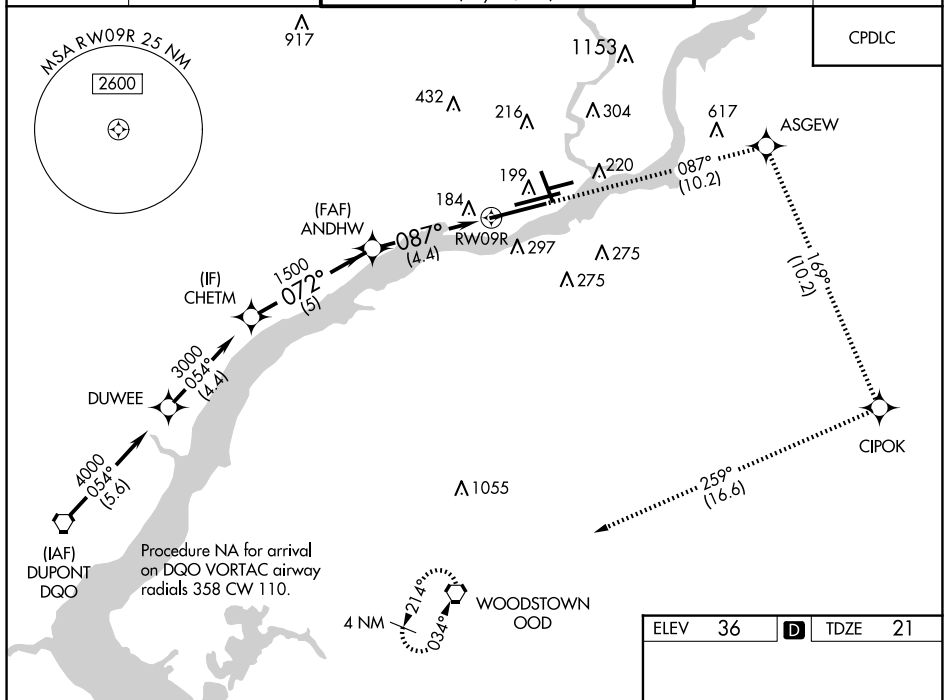

NE-4, 20 MAR 2025 to 17 APR 2025

NE-4 20 MAR 2025 to 17 APR 2025

ELEV	36	D	TDZE	21
------	----	----------	------	----

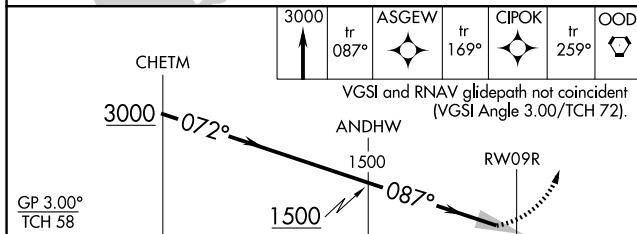

CATEGORY	A	B	C	D
RNP 0.16 DA	424/40 403 (400-¾)			
RNP 0.30 DA	461/50 440 (500-1)			

AUTHORIZATION REQUIRED

TDZ/CL Rwy 9R
HIRL all Rwys
REIL Rwys 9L and 35