

WAAS CH 77517 W03A	APP CRS 038°	Rwy Idg 5940 TDZE 1917 Apt Elev 1919
--	------------------------	---

RNAV (GPS) RWY 3

SAN ANGELO RGNL/MATHIS FLD (SJT)

RNP APCH - GPS.


▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C or above 54°C.
▲ For inop ALS, increase LPV Cat E visibility to RVR 4000, and LNAV/VNAV Cat E and LNAV Cat E visibility to RVR 6000. Circling NA for Cat E west of Rwy 18-36.
ASR # RVR 1800 authorized with use of FD or AP or HUD to DA.

MALSR



MISSED APPROACH:
Climb to 3800 direct
LITAZ and hold.

ATIS 128.45 319.0	SAN ANGELO APP CON ★ 125.35 354.1	MATHIS TOWER ★ 118.3(CTAF) 284.7	GND CON 121.9 348.6	UNICOM 122.95
----------------------	--------------------------------------	-------------------------------------	------------------------	------------------

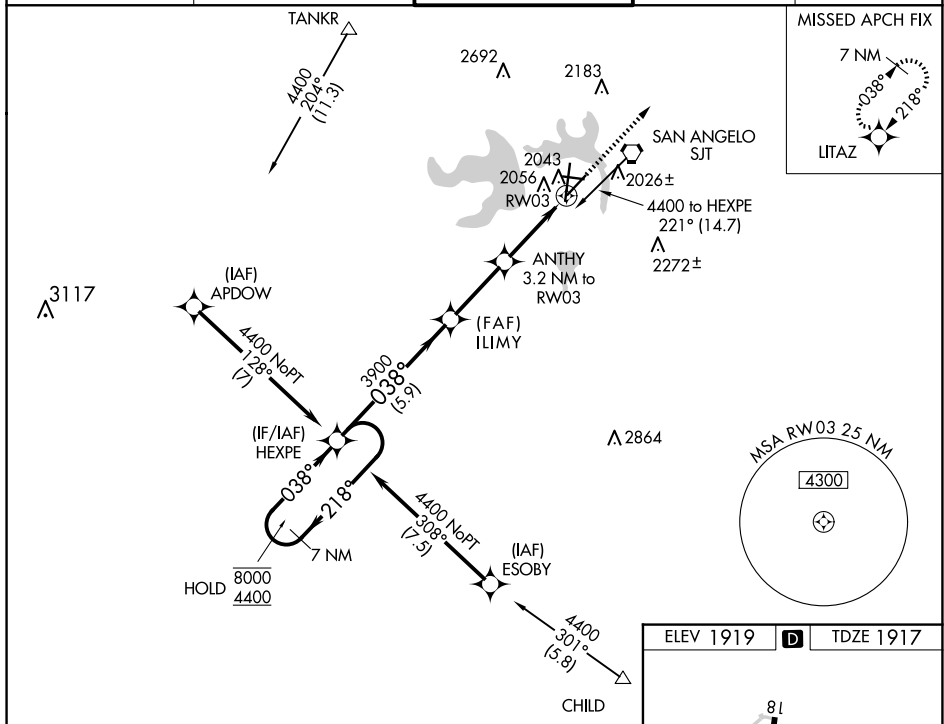

7 NM Holding Pattern

HEPE

ILIMY

ANTHY

RW03

GP 3.00°
TCH 51

Distances: 5.9 NM, 2.8 NM, 2.2 NM, 1 NM

Altitudes: 8000, 4400, 3900, 3000

Angles: 218°, 038°

LNAV only.