


LOC/DME I-SYR 109.9 Chan 36	APP CRS 280°	Rwy Idg TDZE Apt Elev	9014 413 421
---	------------------------	-----------------------------	---


ILS or LOC RWY 28
SYRACUSE HANCOCK INTL (SYR)

DME or RADAR required.		ALS-F-2 	MISSED APPROACH: Climb to 1100 then climbing right turn to 3000 direct SYR VORTAC and hold, continue climb-in-hold to 3000.
------------------------	--	-------------	---

ATIS 124.225	SYRACUSE APP CON 126.125 269.125	SYRACUSE TOWER 120.3 239.0	GND CON 121.7 348.6	CLNC DEL 125.05 257.775
------------------------	--	--------------------------------------	-------------------------------	-----------------------------------

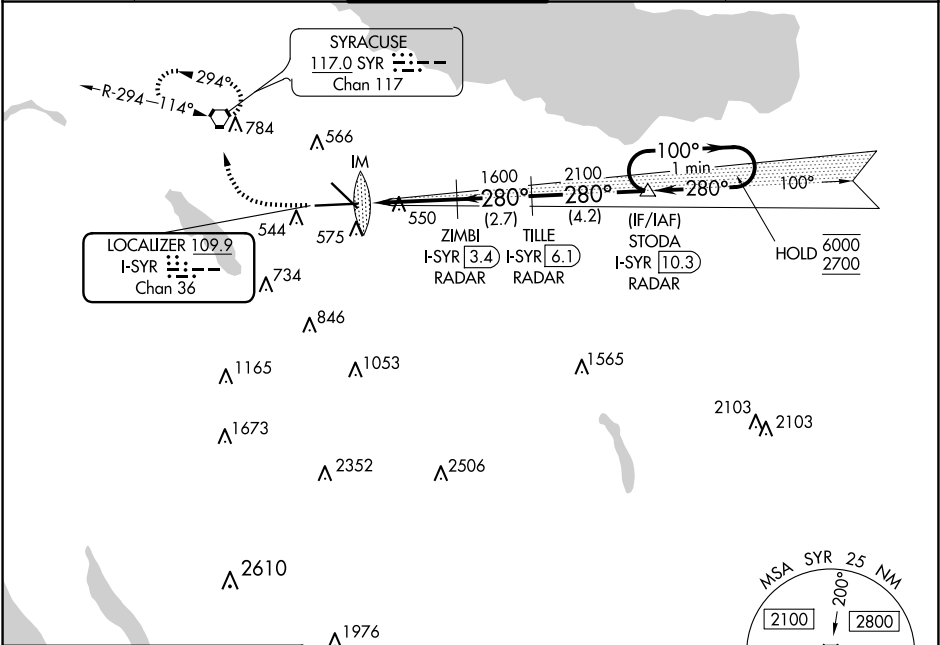

ELEV 421	D	TDZE 413
-----------------	----------	-----------------

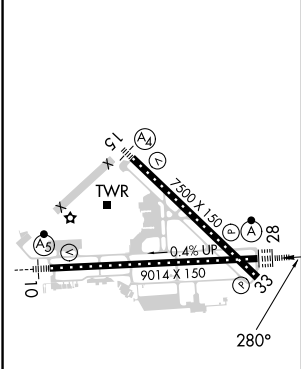

TDZ/CL Rwy 28					
HIRL Rlys 10-28 and 15-33					
FAF to MAP 3.6 NM					
Knots	60	90	120	150	180
Min:Sec	3:36	2:24	1:48	1:26	1:12

1100 3000		SYR	*LOC only	STODA I-SYR [10.3] RADAR	One Minute Holding Pattern
			ZIMBI I-SYR [3.4] RADAR TILLE I-SYR [6.1] RADAR		
I-SYR DME ANTENNA		*I-SYR [0.9]	1600 2100 280° 100° 6000 2700	GS 3.00° TCH 60	
I-SYR [0.2]		IM	0.2 0.9 2.5 NM 2.7 NM 4.2 NM		
CATEGORY	A		B	C	D
S-ILS 28	613/18		200 (200-½)		
S-LOC 28	800/24		387 (400-½)	800/35 387 (400-¾)	
	900-1		920-1	1020-1½	1180-2½
	479 (500-1)		499 (500-1)	599 (600-1½)	759 (800-2½)