

WAAS CH 86245 W13A	APP CRS 128°	Rwy Idg 9111 TDZE 115 Apt Elev 115
--	------------------------	---

RNAV (GPS) RWY 13

VICTORIA RGNL (VCT)


RNP APCH-GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LPV Cat E and LNAV/VNAV all Cats visibility to ¾ SM and LNAV Cat E visibility to 1 SM.

MALSR

MISSED APPROACH:
Climb to 2200 direct
SEYOG and hold.

ATIS 119.025	HOUSTON CENTER 135.05 353.6	VICTORIA TOWER ★ 126.075 (CTAF) 257.95	GND CON 120.525 239.25	UNICOM 122.7
------------------------	---------------------------------------	--	----------------------------------	------------------------

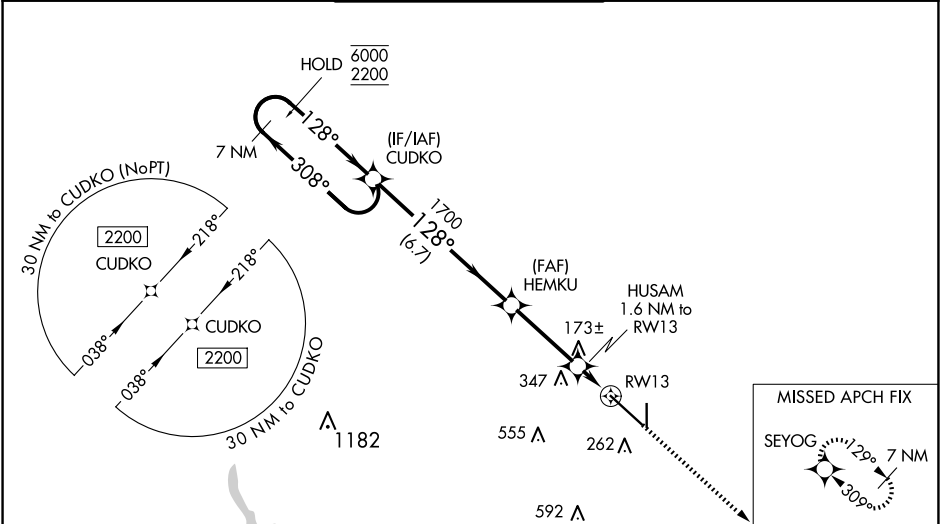

7 NM Holding Pattern		CUDKO		HEMKU		HUSAM 1.6 NM to RW13		RW13		SEYOG	
6000 2200		308° 128°		128°		0.9 NM to RW13		0.7 NM		2200	
GP 3.00° TCH 53		1700		660		0.9 NM		0.7 NM		9111 X 150	
CATEGORY		A		B		C		D		E	
LPV DA		315-½		200 (200-½)							
LNAV/VNAV DA		365-½		250 (300-½)							
LNAV MDA		440-½		325 (400-½)							
CIRCLING		580-1 465 (500-1)		820-2 705 (800-2)		880-2 ½ 765 (800-2 ½)		NA			

ELEV 115

TDZE 115

MIRL Rwy 18-36

REIL Rwy 18 and 36

HIRL Rwy 13-31