RNAV (GPS) RWY 30

JACK BROOKS RGNL (BPT)

WAAS	APP CRS	Rwy Idg	6751
CH 69216	300°	TDZE	12
W30A		Apt Elev	15

RNP APCH - GPS.

T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -4°C or above 54°C. Rwy 30 helicopter visibility reduction below ¾SM NA. Baro-VNAV and VDP NA when using Orange County altimeter setting. When local altimeter setting not received, use Orange County altimeter setting: increase LPV DA to 294 feet and all visibilities ⅛ SM. Increase LNAV/VNAV DA to 355 feet and all visibilities ⅛ SM. Increase all MDAs 40 feet and LNAV visibility Cat C/D/E ¼ SM.

MISSED APPROACH: Climb to 3100 direct GIDDY and hold, continue climb-in-hold to 3100.

ATIS	HOUSTON APP CON	BEAUMONT TOWER★	GND CON	CLNC DEL	UNICOM
126.3	121.3 377.1	119.5 (CTAF) L	124.85	118.3	122.95

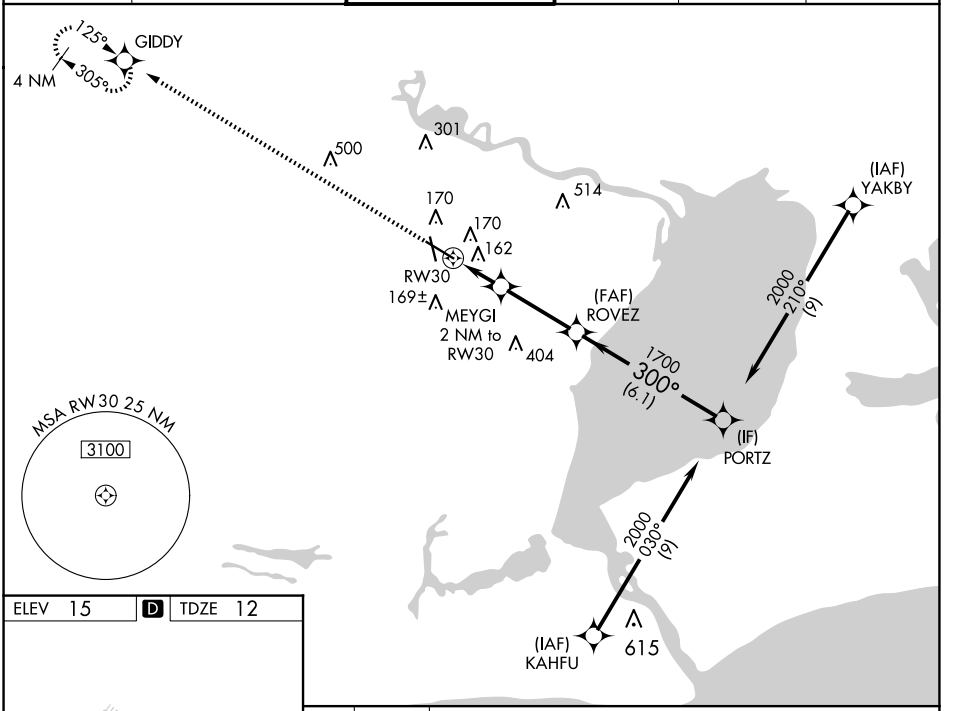

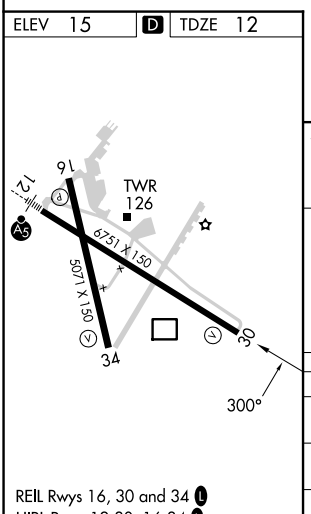

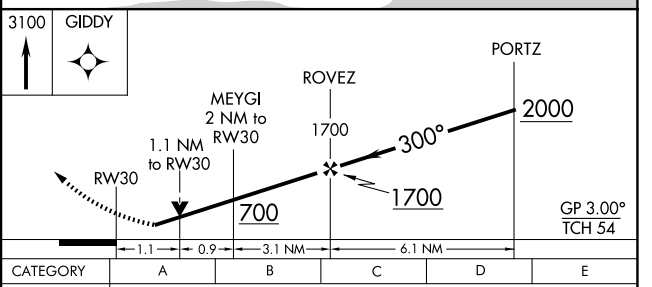

CATEGORY	A	B	C	D	E
LPV DA	262-¾	250 (300-¾)			
LNAV/VNAV DA	323-⅞	311 (400-⅞)			
LNAV MDA	420-1	408 (500-1)	420-1⅛	408 (500-1⅛)	

REIL Rwys 16, 30 and 34 L
HIRL Rwys 12-30, 16-34 L

SC-5, 20 MAR 2025 to 17 APR 2025
SC-5, 20 MAR 2025 to 17 APR 2025