

WAAS CH 50408 W17A	APP CRS 175°	Rwy Idg 7201 TDZE 1004 Apt Elev 1009
--	------------------------	---

RNAV (GPS) RWY 17

PONCA CITY RGNL (PNC)

RNP APCH - GPS.

▼

▲


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. For inop ALS increase LPV visibility all Cats to ½ SM.

MALSR

AS

MISSED APPROACH: Climb to 2700 direct ZULOT and hold.

ASOS 134.075	KANSAS CITY CENTER 127.8 319.1	UNICOM 123.0 (CTAF) 0
------------------------	--	---------------------------------

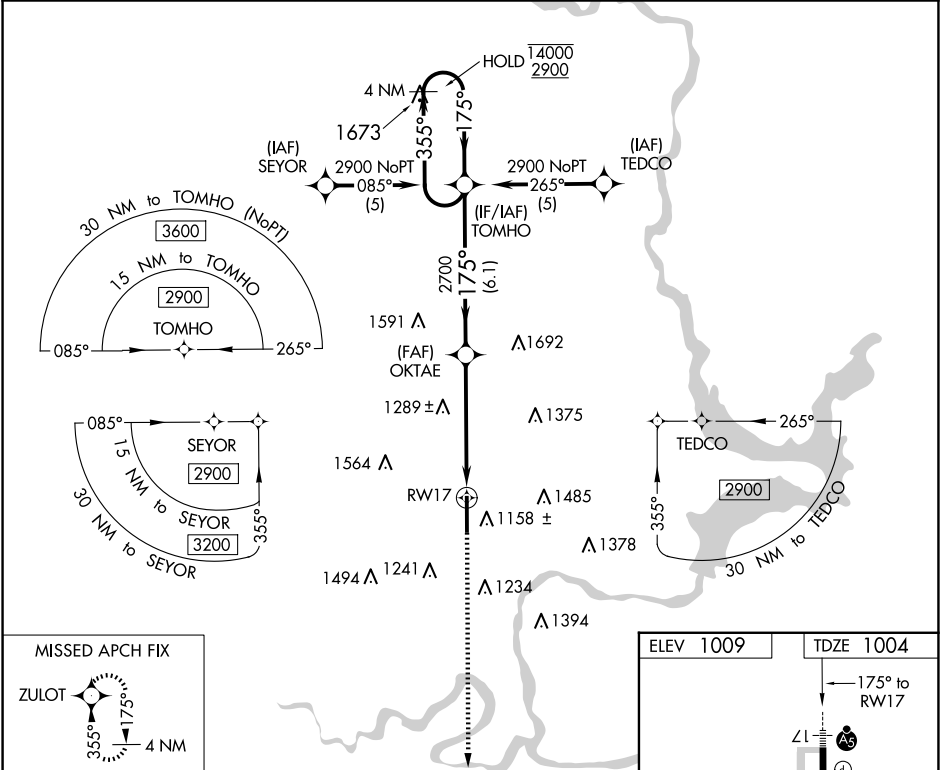

4 NM Holding Pattern

TOMHO

OKTAE

2700

1.6 NM to RW17

GP 3.00° TCH 48

6.1 NM

3.6 NM

1.6 NM

CATEGORY	A	B	C	D
LPV DA		1279-½	275 (300-½)	
LNAV/VNAV DA		1330-½	326 (400-½)	
LNAV MDA	1540-½ 536 (600-½)		1540-1 536 (600-1)	
CIRCLING	1540-1 531 (600-1)	1580-1 571 (600-1)	1800-2¼ 791 (800-2¼)	1880-2¾ 871 (900-2¾)

ELEV 1009

TDZE 1004

175° to RW17

ZULOT

7201 X 100

1050

35

HIRL Rwy 17-35 0