


|  |                        |                             |   |
|--|------------------------|-----------------------------|---|
| WAAS<br>CH <b>49010</b><br><b>W23A</b> | APP CRS<br><b>233°</b> | Rwy Idg<br>TDZE<br>Apt Elev | <b>8002</b><br><b>661</b><br><b>668</b> |
|--|------------------------|-----------------------------|---|


# RNAV (GPS) RWY 23

MBS INTL (MBS)

|  |  |  |  |                           |                         |
|--|--|--|--|---------------------------|-------------------------|
| <p><b>▽</b> For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C (0°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.<br/>For inoperative ALS, increase LNAV/VNAV all Cats visibility to RVR 4500.<br/># RVR 1800 authorized with use of FD or AP or HUD to DA.</p> |  | <p>MALSR<br/></p>                            | <p>MISSED APPROACH:<br/>Climb to 2300 direct WERDO and hold.</p> |                           |                         |
| ATIS<br><b>125.925</b>   | GREAT LAKES APP CON *<br><b>126.45 235.625</b> | SAGINAW TOWER *<br><b>120.1 (CTAF) 257.7</b> | GND CON<br><b>121.7</b>  | CLNC DEL<br><b>121.85</b> | UNICOM<br><b>122.95</b> |

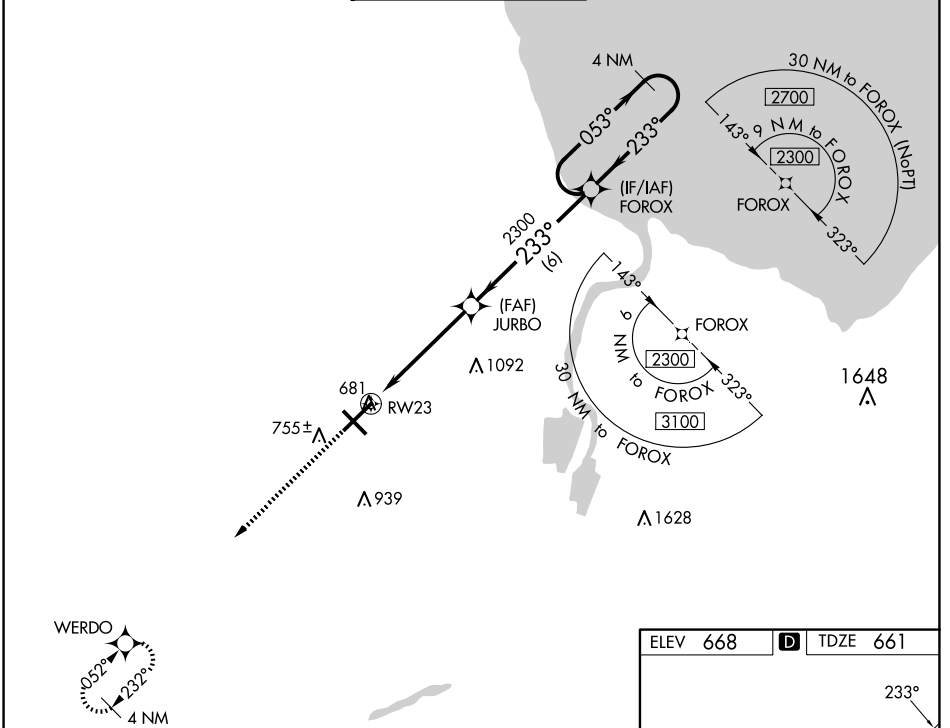

|              |                       |                       |                         |                       |
|--------------|-----------------------|-----------------------|-------------------------|-----------------------|
| 2300         | WERDO                 | JURBO                 | FOROX                   | 4 NM Holding Pattern  |
| *LNAV only   | *1.1 NM to RW23       | 2300                  | 233°                    | 053° → 2300           |
|              |                       |                       | ← 233°                  | GP 3.00° TCH 54       |
|              | 1.1                   | 3.9 NM                | 6 NM                    |                       |
| CATEGORY     | A                     | B                     | C                       | D                     |
| LPV DA #     |                       | 861/24                | 200 (200-½)             |                       |
| LNAV/VNAV DA |                       | 940/24                | 279 (300-½)             |                       |
| LNAV MDA     | 1060/24               | 399 (400-½)           | 1060/35                 | 399 (400-¾)           |
| CIRCLING     | 1080-1<br>412 (500-1) | 1120-1<br>452 (500-1) | 1240-1½<br>572 (600-1½) | 1240-2<br>572 (600-2) |

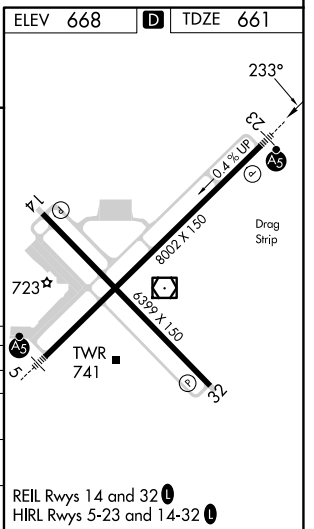

EC-1, 20 MAR 2025 to 17 APR 2025

EC-1, 20 MAR 2025 to 17 APR 2025