


WAAS CH 82510 W07A	APP CRS 065°	Rwy Idg TDZE Apt Elev	4784 319 331
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 7

WATERTOWN INTL (ART)

RNP APCH. ▼ ▲ For inop ALS, increase LPV, LNAV/VNAV visibilities to ¾ SM and LNAV Cat C/D visibilities to 1 ¾ SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C.		MALSR AS ■	MISSED APPROACH: Climb to 900 then climbing left turn to 3500 direct NOYAQ and hold.	
ASOS 132.325	KGTB ATIS 119.525	WHEELER-SACK APP CON 124.875 307.125	CLNC DEL 120.8	UNICOM 123.0 (CTAF) U

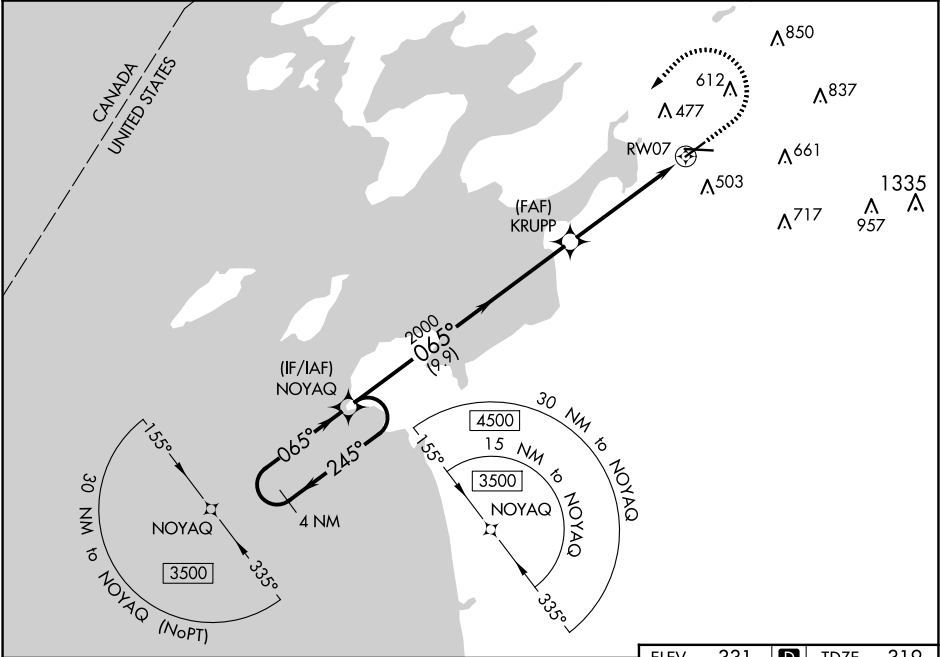

4 NM Holding Pattern		NOYAQ		KRUPP		RW07		ELEV 331 D TDZE 319				
3500		245°		065°		065°		900 3500 NOYAQ * LNAV only GP 3.00° TCH 51 01 0.3% UP 1999 X 150 02 0.3% UP 7001 X 150 03 065° 04 281				
9.9 NM		3.9 NM		1.3 NM								
CATEGORY	A	B	C	D								
LPV DA	519-½		200 (200-½)									
LNAV/VNAV DA	578-½		259 (300-½)									
LNAV MDA	780-½ 461 (500-½)		780-1 461 (500-1)									
C CIRCLING	960-1 629 (700-1)		980-1¾ 649 (700-1¾)		1080-2½ 749 (800-2½)		HIRL Rwy 7-25 U MIRL Rwy 10-28 U					