

APP CRS	Rwy Idg	9501
274°	TDZE	1027
	Apt Elev	1027

RNAV (RNP) Z RWY 27

KANSAS CITY INTL (MCI)


RADAR required for procedure entry. RNP AR APCH - GPS.

For uncompensated Baro-VNAV systems, procedure NA below -19°C or above 54°C. For inop ALS, increase RNP 0.15 all Cats visibility to RVR 5500 and RNP 0.30 all Cats visibility to 1 3⁄8 SM.

MALSR

MISSED APPROACH: Climb to 4000 on track 274° to WOOKIE and on track 325° to BOWLR and hold.

D-ATIS	KANSAS CITY APP CON	INTERNATIONAL TOWER	GND CON	CLNC DEL	CPDLC
128.375	120.95 318.1	128.2 254.25	121.8	135.7	

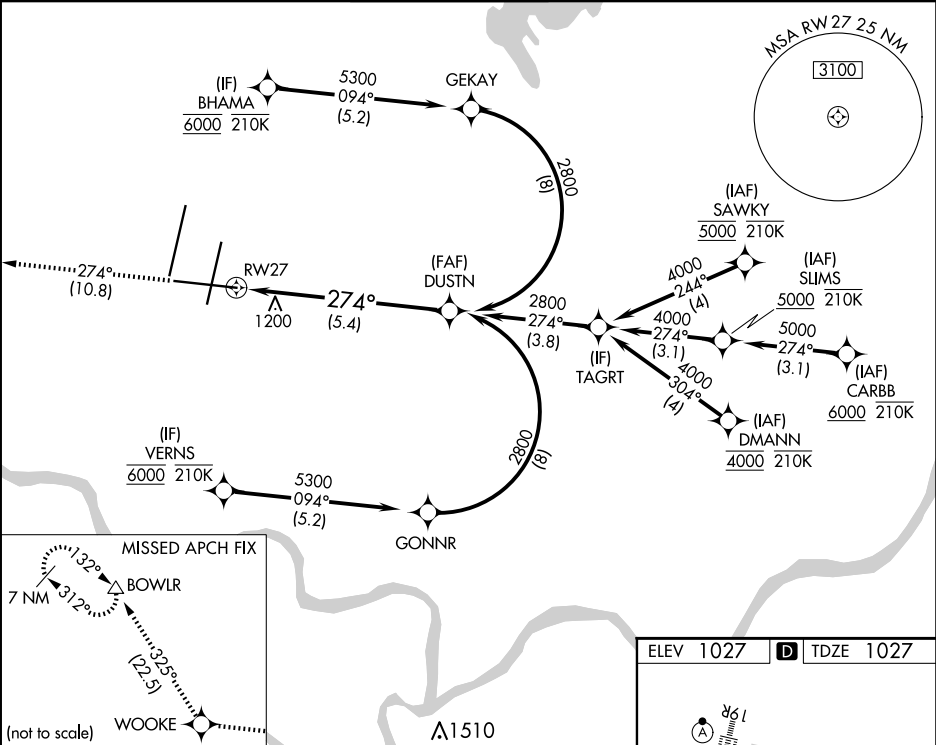

4000 WOOKIE

tr 274°

tr 325°

tr 325°

WOOKIE

BOWLR

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 72).

RW27

274°

2800

GP 3.00° TCH 57

See planview for multiple IF locations.

5.4 NM

CATEGORY

A

B

C

D

RNP 0.15 DA

1371/30

344 (400-%)

RNP 0.30 DA

1506/50

479 (500-1)

AUTHORIZATION REQUIRED

ELEV 1027

TDZE 1027

1066

1080

1164

1075

9501

1R

274°

HIRL all Rwys

TDZ/CL Rwys 1L, 1R, 19R and 19L