

LOC/DME I-TYN 110.9 Chan 46	APP CRS 036°	Rwy Idg 8000 TDZE 40 Apt Elev 42
---	------------------------	---

ILS or LOC RWY 4R


LAFAYETTE RGNL/PAUL FOURNET FLD (LFT)

DME required for procedure entry and for LOC only.

MISSED APPROACH FIX
to 2000 on LFT R-035 to
BEDDY INT/LFT 18.9 DME
and hold.

⚠ Rwy 4R helicopter visibility reduction below 3/4 SM NA. VDP NA when using Acadiana Rgnl altimeter setting. When local altimeter setting not received, use Acadiana Rgnl altimeter setting and increase all DA 29 feet and all MDA 40 feet, increase S-ILS 4R and S-LOC 4R visibility all Cats 1/8 SM, Circling visibility Cat C/D 1/4 SM.

ATIS 134.05	LAFAYETTE APP CON * 121.1 363.0	LAFAYETTE TOWER * 118.5 (CTAF) 0 257.8	GND CON 121.8	CLNC DEL 125.55	UNICOM 122.95
-----------------------	---	--	-------------------------	---------------------------	-------------------------


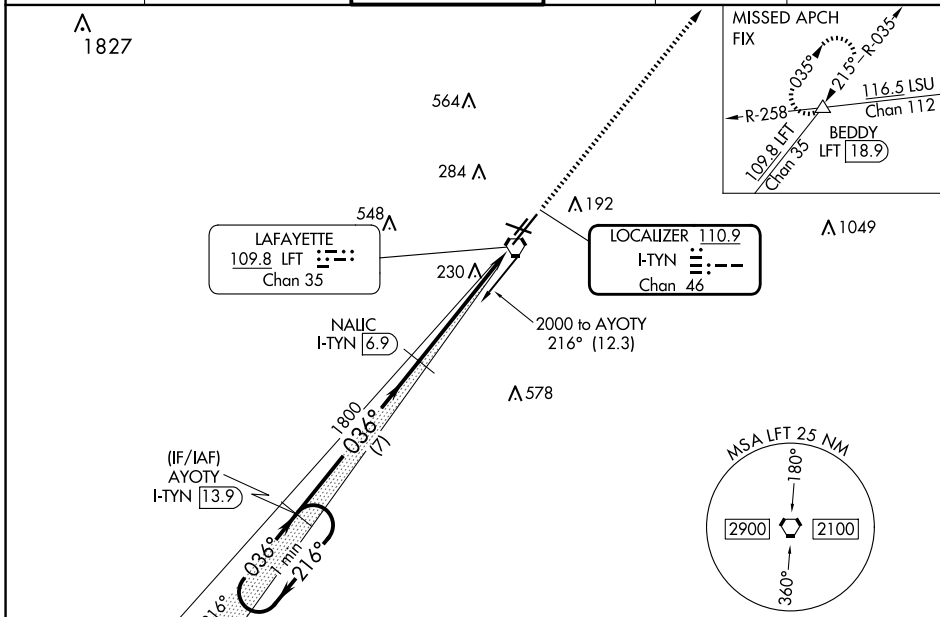


SC-4, 20 MAR 2025 to 17 APR 2025

SC-4, 20 MAR 2025 to 17 APR 2025

ELEV 42	D TDZE 40
----------------	-------------------------

REIL Rwy 4L, 4R, 11, 22R and 29
MIRL Rwy 4L-22R and 11-29
HIRL Rwy 4R-22L

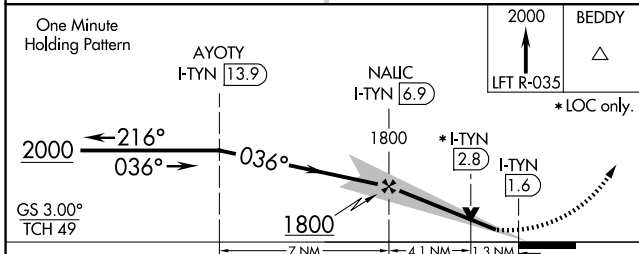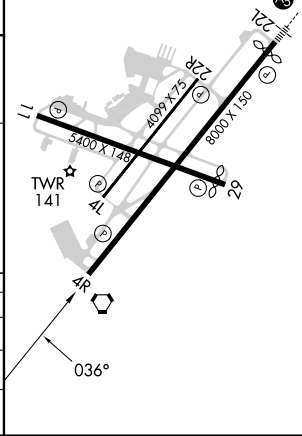

CATEGORY	A	B	C	D
S-ILS 4R	316-7/8		276 (300-7/8)	
S-LOC 4R	500-1	460 (500-1)	500-13/8	460 (500-13/8)
C CIRCLING	540-1 498 (500-1)	580-1 538 (600-1)	700-13/4 658 (700-13/4)	700-2 658 (700-2)