

LOC/DME I-VQQ	APP CRS	Rwy Idg	12504
109.5	005°	TDZE	72
Chan 32		Apt Elev	80

ILS or LOC RWY 36R


CECIL (VQQ)

From BRADO: RNAV 1-GPS required.
DME or RADAR required for LOC only.

MALSRR

MISSED APPROACH: Climb to 800 then climbing right turn to 3000 on heading 050° and on CRG VORTAC R-263 to CRG VORTAC and hold. (TACAN aircraft climb to 800 then climbing right turn to 3000 on heading 050° and on CRG VORTAC R-263 to UHUCI/CRG 5 DME and hold west, right turn, 083° inbound).

ATIS	JACKSONVILLE APP CON	CECIL TOWER ★	GND CON	CINC DEL	GCO
125.275	127.775 377.075	126.1 (CTAF) 235.625	121.625 226.675	123.975 254.25	135.075

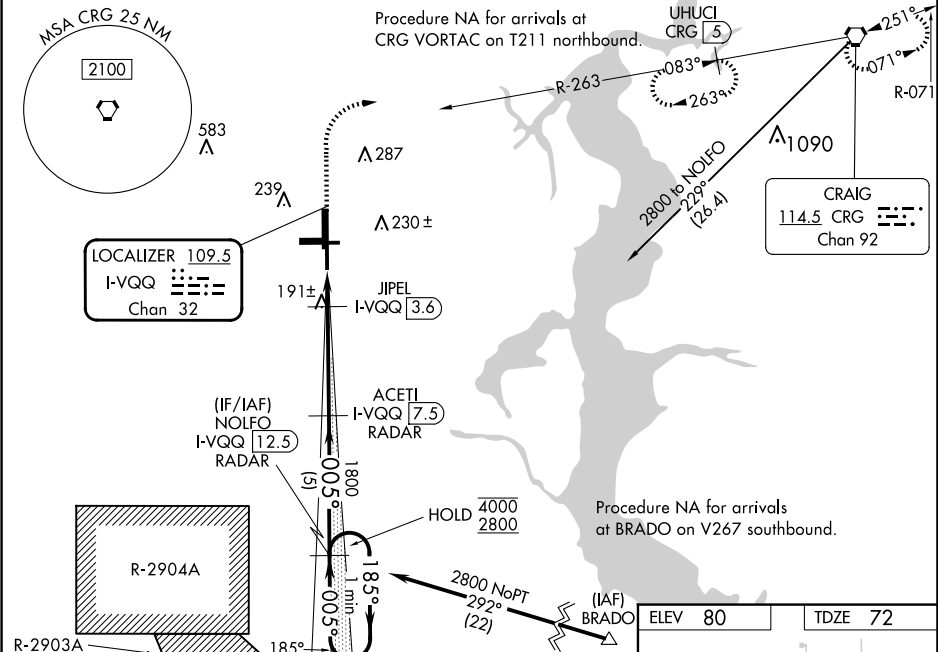

One Minute Holding Pattern

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 66).

4000 2800 185° 005° 1800 005° 1800 005°

GS 3.00° TCH 49

5 NM 3.9 NM 1.4 NM

800 3000 CRG R-263 CRG


ACETI I-VQQ 7.5 RADAR

JIPEL I-VQQ 3.6

*LOC only.

560

2.2

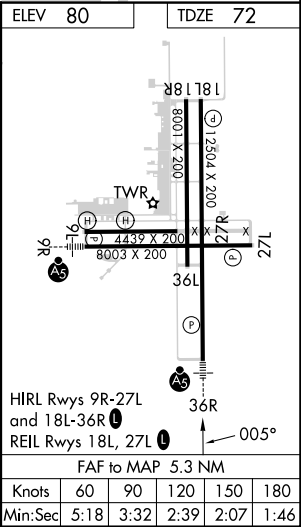

CATEGORY	A	B	C	D	E
S-ILS 36R	272-1/2		200 (200-1/2)		
S-LOC 36R	560-1/2	488 (500-1/2)	560-1	488 (500-1)	
CIRCLING	560-1	480 (500-1)	600-1 1/2 520 (600-1/2)	640-2 560 (600-2)	900-3 820 (900-3)
JIPEL FIX MINIMUMS (DME REQUIRED)					
S-LOC 36R	460-1/2	388 (400-1/2)	460-3/8	388 (400-3/8)	
CIRCLING	540-1 460 (500-1)	560-1 480 (500-1)	600-1 1/2 520 (600-1/2)	640-2 560 (600-2)	900-3 820 (900-3)