

WAAS CH 42707 W01A	APP CRS 012°	Rwy Idg 6400 TDZE 127 Apt Elev 129
--	------------------------	---

RNAV (GPS) RWY 1L
BETHEL (BET)(PABE)


T For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -25°C (-13°F) or above 54°C (130°F).
Circling NA west of Rwy 1L-19R. DME/DME RNP-0.3 NA.
For inop ALS, increase LNAV Cat C/D visibility to RVR 6000.

MALSR



MISSED APPROACH: Climb to 2000
direct KUSKM and left turn on track
257° to ROLLR and hold.

ATIS 119.8	ANCHORAGE CENTER 125.2 372.0	BETHEL TOWER ★ 118.7 (CTAF) 0	GND CON 121.7
----------------------	--	--	-------------------------

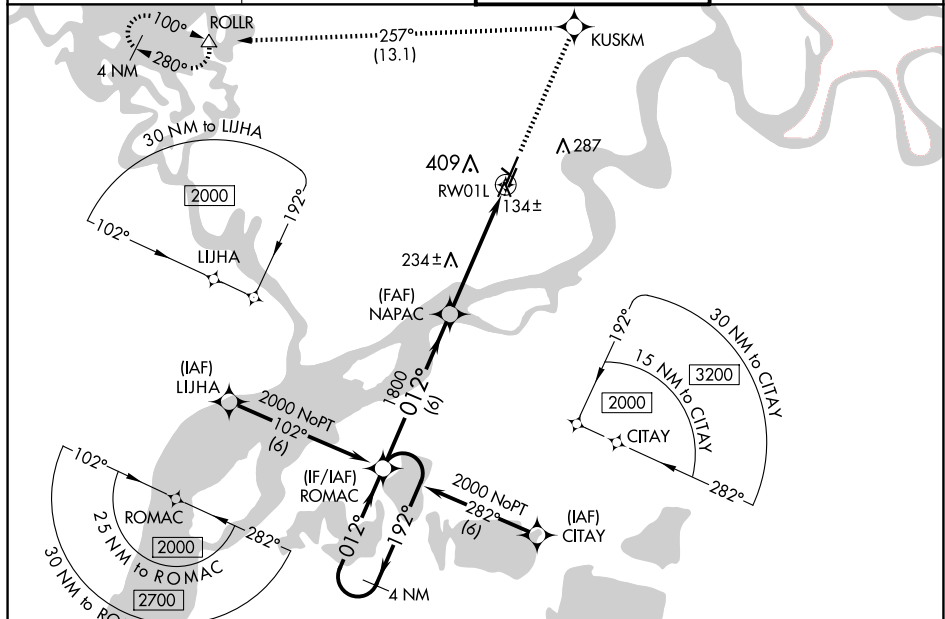

ROMAC (NoPT)

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 39).

4 NM Holding Pattern ROMAC

2000 ← 192° 012° → 012°

GP 3.00° TCH 47

6 NM 3.9 NM 1.1 NM

NAPAC 1800

*1.1 NM to RW01L

RW01L

2000 KUSKM tr 257° ROLLR △

ELEV 129 TDZE 127

HIRL Rlys 1L-19R, 1R-19L and 12-30

REIL Rlys 1R and 19L

BETHEL, ALASKA
Amdt 1C 22JUN17

60°47'N-161°50'W

BETHEL (BET)(PABE)
RNAV (GPS) RWY 1L