




| | | | |
|--|------------------------|-----------------------------|---------------------------------------|
| WAAS CH 56215 W33A | APP CRS 332° | Rwy Idg TDZE Apt Elev | 6500 11 15 |
|--|------------------------|-----------------------------|---------------------------------------|

RNAV (GPS) RWY 33

LAKE CHARLES RGNL (LCH)

| | | |
|--|-------|---|
| RNP APCH. | MALSF | MISSED APPROACH: Climb to 1700 direct ZUKLA and hold. |
| ⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C (27°F) or above 43°C (109°F). For inop MALSF, increase LNAV/VNAV all Cats visibility to ½ and LNAV all Cats visibility to 1 mile. | | |

| | | | | | |
|-----------------------|---|--|-------------------------|---------------------------|-------------------------|
| ATIS 118.75 | LAKE CHARLES APP CON* 119.35 353.75 | LAKE CHARLES TOWER* 120.7 (CTAF) 257.8 | GND CON 121.8 | CLNC DEL 126.25 | UNICOM 122.95 |
|-----------------------|---|--|-------------------------|---------------------------|-------------------------|

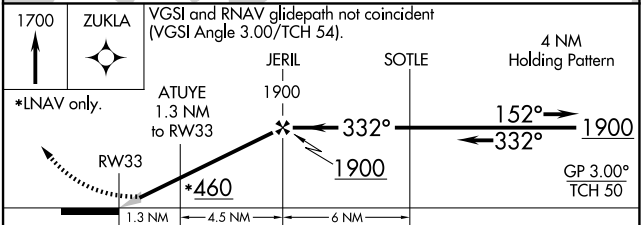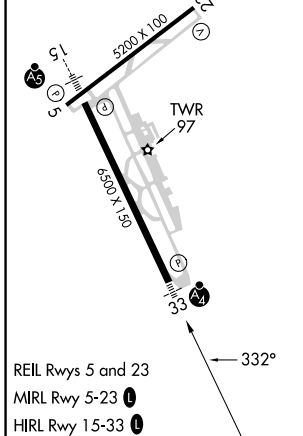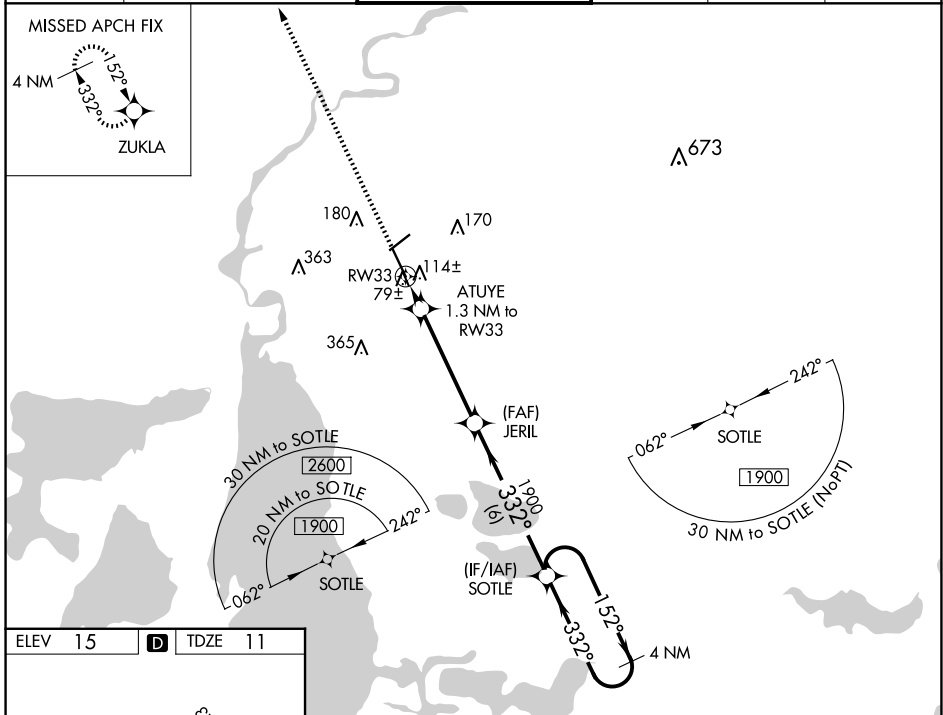

| CATEGORY | A | B | C | D |
|-------------------|----------------------|----------------------|------------------------|------------------------|
| LPV DA | | 211-¾ | 200 (200-¾) | |
| LNAV/VNAV DA | | 296-¾ | 285 (300-¾) | |
| LNAV MDA | | 380-¾ | 369 (400-¾) | |
| C CIRCLING | 440-1 425 (500-1) | 480-1 465 (500-1) | 580-1½ 565 (600-1½) | 680-2¼ 665 (700-2¼) |