

WAAS CH 70511 W10A	APP CRS 096°	Rwy ldg 6498 TDZE 609 Apt Elev 609
--	------------------------	--

RNAV (GPS) RWY 10

DELTA COUNTY (ESC)

RNP APCH - GPS.

▼


▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. For inop ALS, increase LNAV/VNAV visibility to 1 SM.

MALSR

MISSED APPROACH:
Climb to 2500 direct
ZUMAB and hold.

AWOS-3PT 121.425	MINNEAPOLIS CENTER 127.65	UNICOM 122.8 (CTAF)
----------------------------	-------------------------------------	-------------------------------

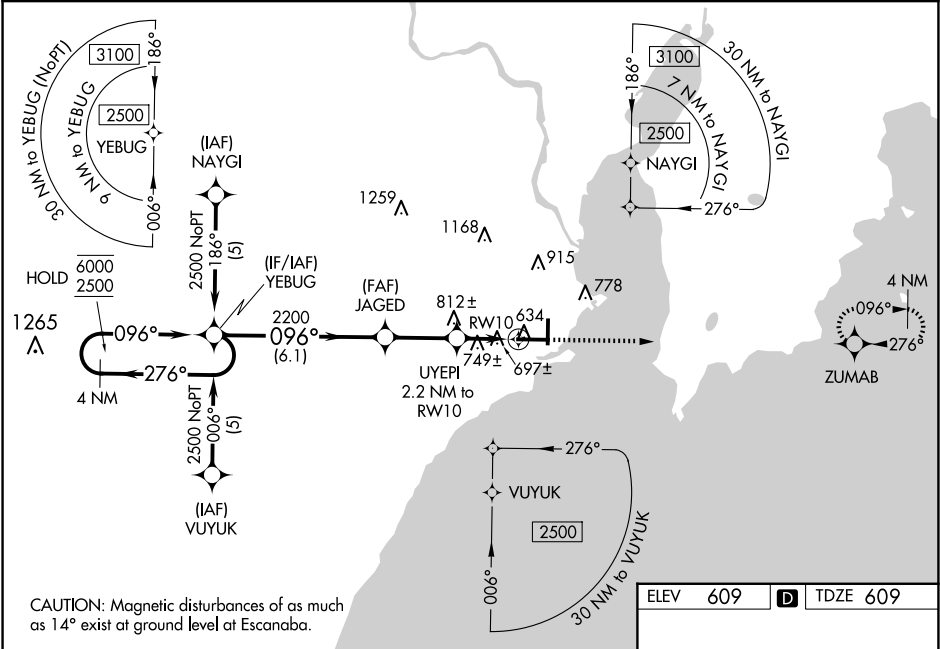

4 NM Holding Pattern

YBUG

JAGED

UYEPI 2.2 NM to RWY 10

1 NM to RWY 10

RWY 10

6000

2500

GP 3.00°

TCH 56

276°

096°

096°

2200

1360

6.1 NM

2.6 NM

1.2 NM

1 NM

2500

ZUMAB

CATEGORY	A	B	C	D
LPV DA		809-1/2	200 (200-1/2)	
LNAV/VNAV DA		967-5/8	358 (400-5/8)	
LNAV MDA	1000-1/2	391 (400-1/2)	1000-5/8	391 (400-5/8)
CIRCLING	1060-1 451 (500-1)	1080-1 471 (500-1)	1280-2 671 (700-2)	1480-2 3/4 871 (900-2 3/4)

ELEV 609 TDZE 609

096°

6498 X 150

5016 X 100

28 0.3% UP

61

649

HIRL Rwy 10-28

MIRL Rwy 1-19

REIL Rws 1 and 28