

VORTAC HYS	APP CRS	Rwy Idg	6501
110.4	332°	TDZE	1994
Chan 41		Apt Elev	1999

VOR/DME RWY 34

HAYS RGNL (HYS)

⚠



When local altimeter setting not received, use Russell altimeter setting: increase all MDA 80 feet and visibility S-34 Cat C and Circling Cat C and D ¼ SM. Circling NA for Cat D northwest of Rwy 4 and west of Rwy 16. VDP NA with Russell altimeter setting. For inop MALSR, increase S-34 Cat D visibility to 1 ¼ mile.

MALSR

MISSED APPROACH:

Climb to 3800 via HYS R-350 then climbing right turn to 3900 direct HYS VORTAC and hold.

AWOS-3PT 125.525	KANSAS CITY CENTER 124.4 322.4	UNICOM 122.8 (CTAF)
---------------------	-----------------------------------	------------------------

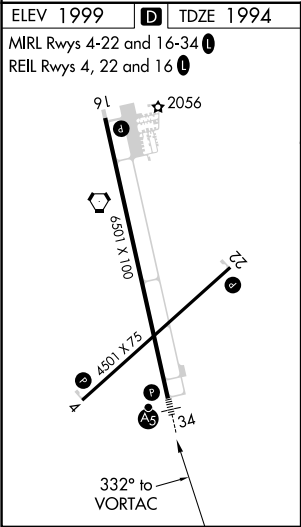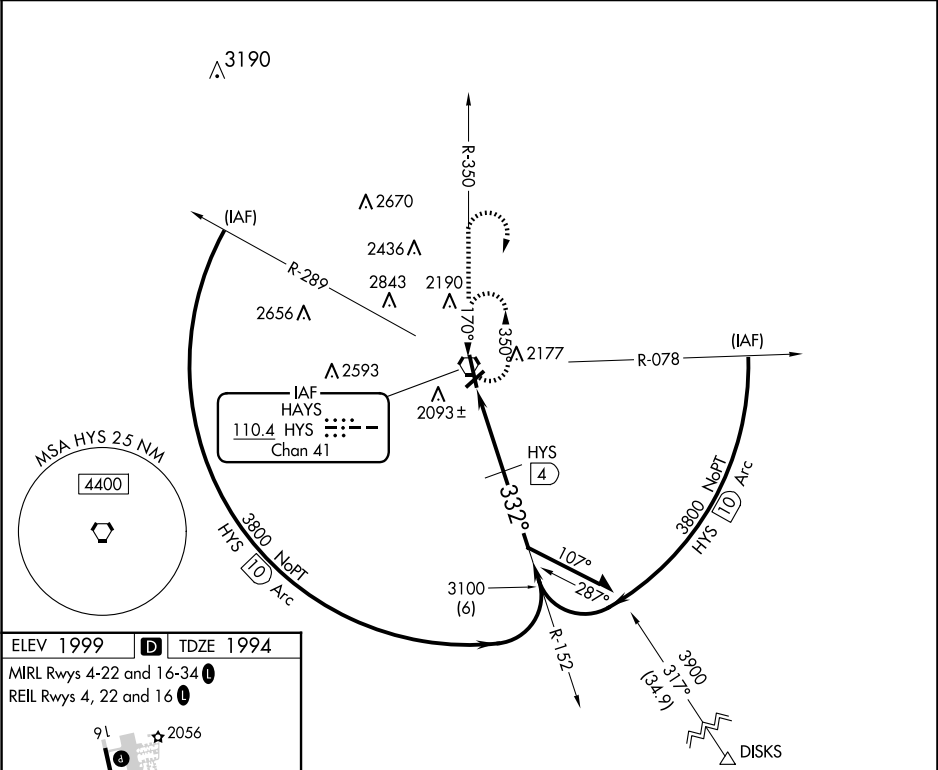

3800	3900	HYS					
VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 43).							
HYS VORTAC							
Remain within 10 NM							
152°							
3800							
332°							
3100							
HYS 1.9							
HYS 4							
HYS 0.8							
TCH 40							
1.1							
2.1 NM							
CATEGORY	A		B		C		D
S-34	2380-1/2 386 (400-1/2)					2380-1 386 (400-1)	
CIRCLING	2480-1 481 (500-1)		2560-1 1/2 561 (600-1 1/2)		2680-2 1/4 681 (700-2 1/4)		

NC-2, 20 MAR 2025 to 17 APR 2025

NC-2, 20 MAR 2025 to 17 APR 2025