

FORT BELVOIR, VIRGINIA

ILS or LOC RWY 32

LOC/DME I-DAA	APCH CRS	Rwy Idg
108.9	322°	4529
Chan 26		TDZE 68
		Arpt Elev 74

[USA]

DAVISON AAF (KDAV)

RADAR required for procedure entry from DCA VOR.

- * When ALS inop, increase RVR to 45, vis to 7/8 mile.
- ** When ALS inop, increase CAT AB RVR to 55, vis to 1 mile, CAT CD vis to 1 1/8 miles.
- *** When ALS inop, increase CAT AB RVR to 55, vis to 1 mile, CAT CD vis to 1 1/8 miles.

MALSF




MISSED APPROACH: Climb to 800, then climbing left turn to 3000 direct to HAXIL (DCA R-181/17.4 DME) and hold. Continue climb in hold to 3000.

ATIS	POTOMAC APP CON	TOWER	GND CON	CLNC DEL	PAR
128.175	118.95 319.1	124.275 (CTAF) 229.4	121.9 351.8	351.8	

† If local altimeter setting not received, use Ronald Reagan Washington National altimeter setting.

Visibility reduction by helicopters not authorized.

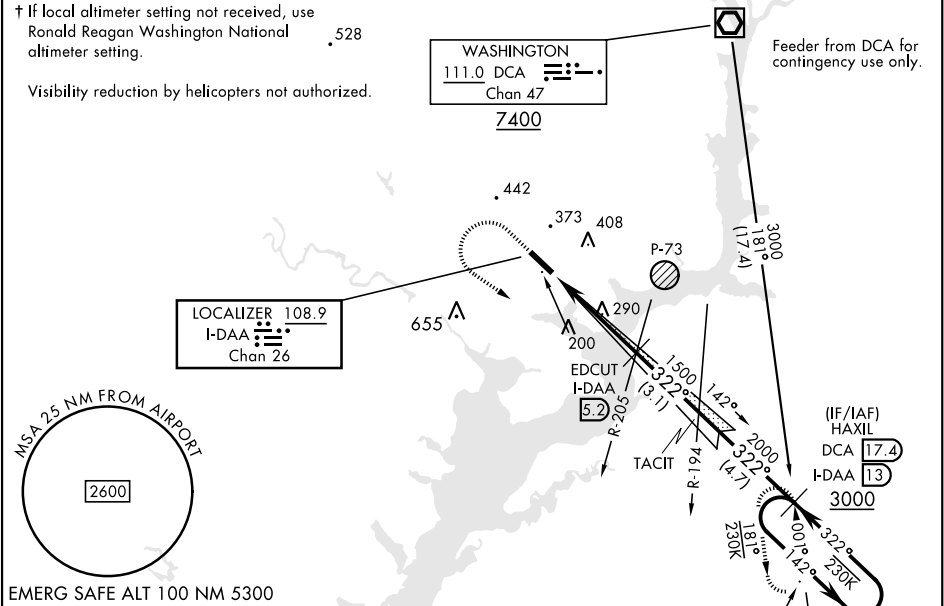

800	3000	HAXIL I-DAA 13	HAXIL DCA 17.4 I-DAA 13	One Minute Holding Pattern
VDP not authorized with KDAV altimeter.				
EDCUT I-DAA 5.2				
TACIT DCA R-194				
GS 3.00° TCH 34				
4.4 NM				
CATEGORY	A	B	C	D
S-ILS 32*	348/40 280 (300-3/4)			
S-LOC 32**	580/40	512 (600-3/4)	580-1 1/4	512 (600-1 1/4)
CIRCLING	680-1 606 (700-1)	720-1 646 (700-1)	760-2 686 (700-2)	1000-3 926 (1000-3)
† RONALD REAGAN WASHINGTON NATIONAL ALTIMETER SETTING MINIMUMS				
S-ILS 32	388/40 320 (400-3/4)			
S-LOC 32***	620/40	552 (600-3/4)	620-1 1/8	552 (600-1 1/8)
CIRCLING	720-1 646 (700-1)	760-1 686 (700-1)	800-2 726 (800-2)	1040-3 966 (1000-3)

ELEV	74	TDZE	68
Rwy 14 Idg 4930' Rwy 32 Idg 4529'			
HIRL Rwy 14-32			
FAF to MAP 4.4 NM			
Knots	60	90	120 150 180
Min:Sec	4:24	2:56	2:12 1:46 1:28

FORT BELVOIR, VIRGINIA

38°43'N-77°11'W

DAVISON AAF (KDAV)

Amtd 1 23JAN25

ILS or LOC RWY 32

NE-3, 20 MAR 2025 to 17 APR 2025

NE-3, 20 MAR 2025 to 17 APR 2025