


LOC/DME I-CBF 111.35 Chan 50(Y)	APP CRS 357°	Rwy Idg TDZE Apt Elev	5500 1245 1245
---	------------------------	-----------------------------	---

ILS or LOC RWY 36


COUNCIL BLUFFS MUNI (CBF)

<p>V VDP NA with Eppley Airfield altimeter setting. When local altimeter setting not received, use Eppley Airfield altimeter setting and increase S-ILS 36 DA to 1498 feet, and all MDA 60 feet and increase S-LOC 36 Cats C and D and Circling Cat C and D visibility ¼ SM. HODIN fix minimums: increase Circling Cat C and D visibility ¼ SM.</p>		<p>MISSED APPROACH: Climb to 3000 then right turn direct OVR VORTAC and hold.</p>	
AWOS-3 126.575	OMAHA APP CON 124.5 263.0	CLNC DEL 127.675	UNICOM 122.725 (CTAF)

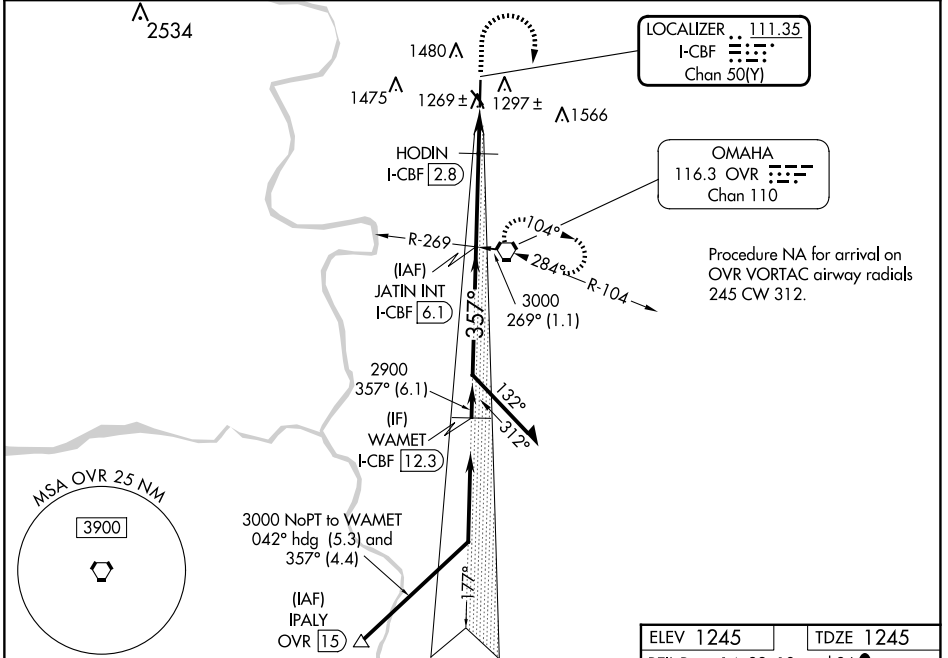

NC-3, 20 MAR 2025 to 17 APR 2025

NC-3, 20 MAR 2025 to 17 APR 2025

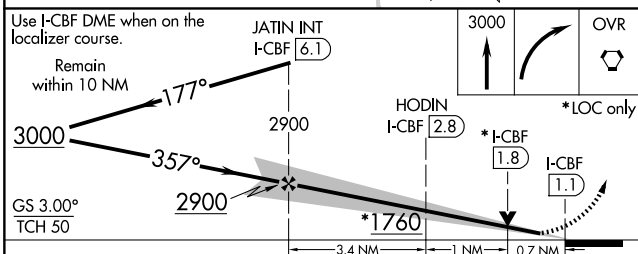

ELEV 1245	TDZE 1245
REIL Rws 14, 32, 18, and 36	
MIRL Rwy 14-32	
HIRL Rwy 18-36	
FAF to MAP 5.1 NM	
Knots	60 90 120 150 180
Min:Sec	5:06 3:24 2:33 2:02 1:42

CATEGORY	A	B	C	D
S-ILS 36		1445-¾ 200 (200-¾)		
S-LOC 36	1760-1	515 (600-1)	1760-1⅜	515 (600-1⅜)
CIRCLING	1780-1 535 (600-1)	1840-1 595 (600-1)	1840-1½ 595 (600-1½)	1880-2 635 (700-2)
HODIN FIX MINIMUMS				
S-LOC 36	1520-1 275 (300-1)			
CIRCLING	1780-1 535 (600-1)	1840-1 595 (600-1)	1840-1½ 595 (600-1½)	1880-2 635 (700-2)