



22195

RNAV (GPS) RWY 18
MID-AMERICA INDUSTRIAL (H71)


T Circling Rwy 36 NA at night. For uncompensated Baro-VNAV systems, **A**NA LNAV/VNAV NA below -16°C or above 54°C.

MISSED APPROACH: Climb to 2600 direct NOBME and hold.

AWOS 3-PT 120.1	TUL ASOS 124.9 377.2	TULSA APP CON 119.1 360.825	UNICOM 122.8 (CTAF) 0
---------------------------	--------------------------------	---------------------------------------	---------------------------------

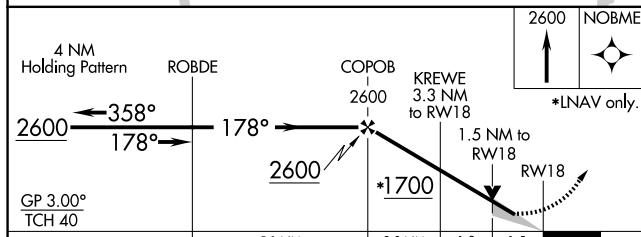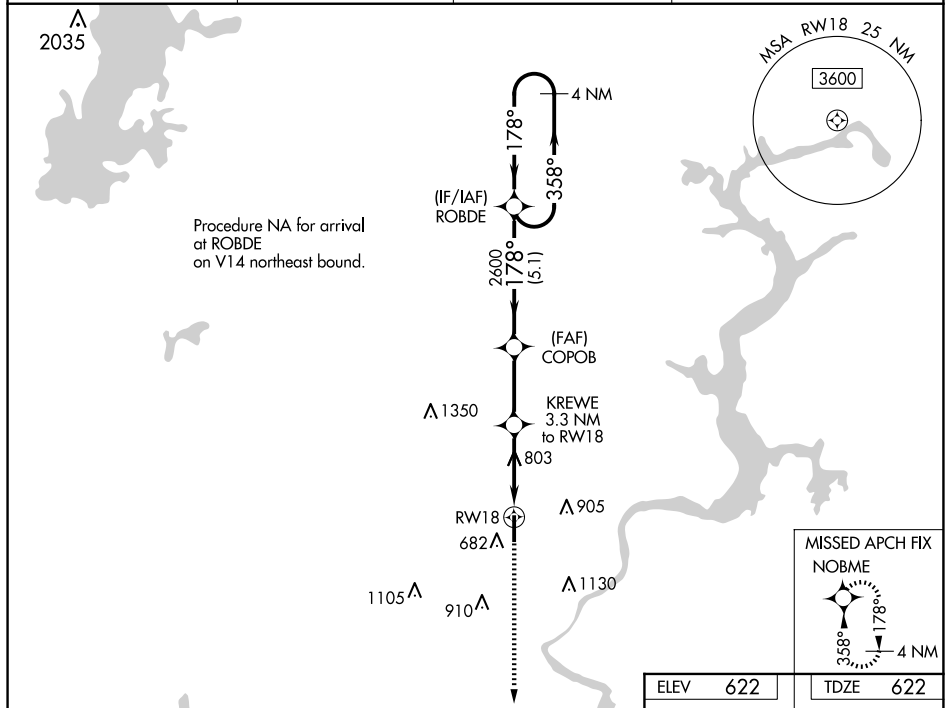

CATEGORY		A		B		C		D	
LPV	DA	943-1 $\frac{1}{8}$		321 (400-1 $\frac{1}{8}$)				NA	
LNAV/ VNAV	DA	1108-1 $\frac{5}{8}$		486 (500-1 $\frac{5}{8}$)				NA	
LNAV	MDA	1140-1		518 (600-1)		1140-1 $\frac{3}{8}$ 518 (600-1 $\frac{3}{8}$)		NA	
 CIRCLING		1200-1		578 (600-1)		1560-2 $\frac{3}{4}$ 938 (1000-2 $\frac{3}{4}$)		NA	

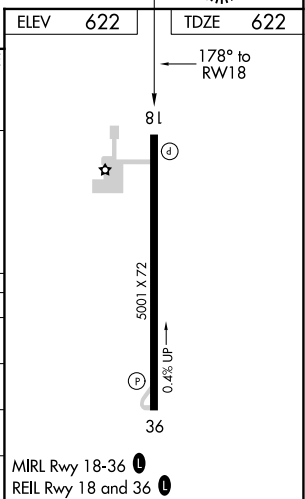

MID-AMERICA INDUSTRIAL (H71)
RNAV (GPS) RWY 18

SC-1, 20 MAR 2025 to 17 APR 2025