

WAAS CH 78227 W01A	APP CRS 007°	Rwy Idg TDZE 124 Apt Elev 130
--	------------------------	---

RNAV (GPS) RWY 1


HARRELL FLD (CDH)

RNP APCH - GPS.

Baro-VNAV NA when using El Dorado altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 43°C. Rwy 1 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use El Dorado altimeter setting and increase LPV DA to 507 feet, LNAV/VNAV DA to 499 feet and all MDA 80 feet; increase LPV all Cats visibility ½ SM, LNAV Cats C and D ¾ SM, and Circling Cat D ¼ SM.

MISSED APPROACH:
Climb to 2700 direct BUSGE and hold.

AWOS-3 125.2	FORT WORTH CENTER 128.2 269.1	UNICOM 122.7 (CTAF)
------------------------	---	-------------------------------

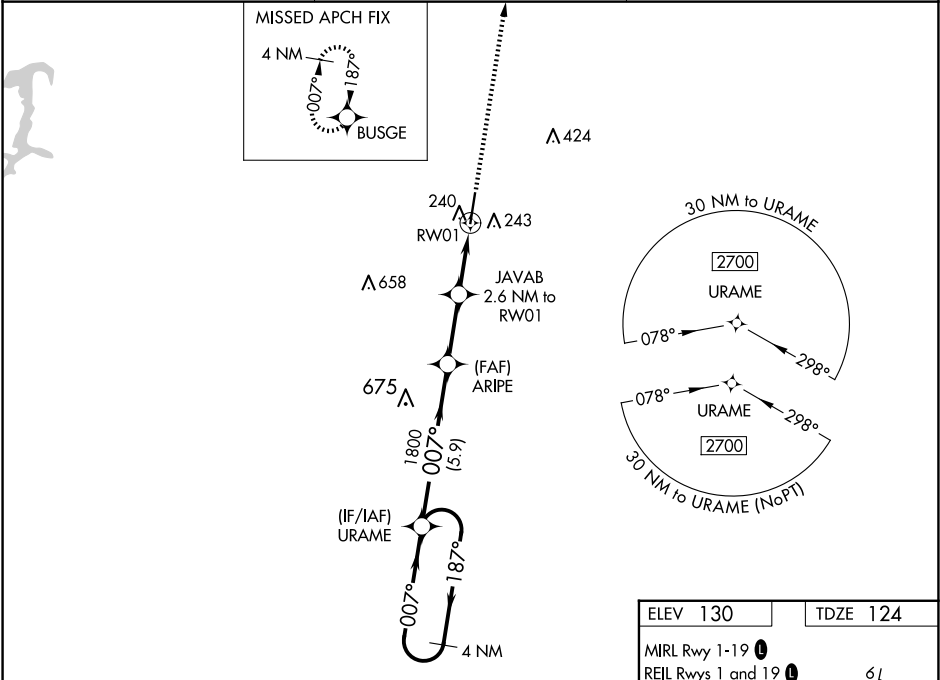

4 NM Holding Pattern

URAM

2700

187°

007°

GP 3.00° TCH 45

007°

1800

5.9 NM

2.5 NM

2.6 NM

ARIP

1800

JAVAB 2.6 NM to RW01

*980


RW01

2700

BUSGE

*LNAV only

CATEGORY	A	B	C	D
LPV DA		430-1	306 (300-1)	
LNAV/VNAV DA		422-1	298 (300-1)	
LNAV MDA		500-1	376 (400-1)	
CIRCLING	560-1 430 (500-1)	580-1 450 (500-1)	580-1½ 450 (500-1½)	960-2¾ 830 (900-2¾)

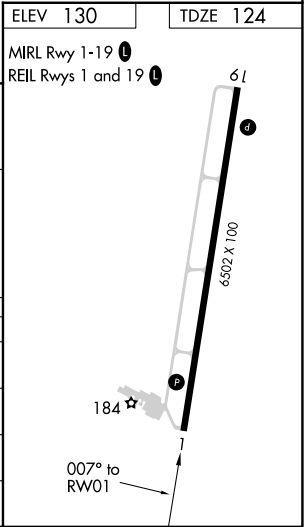

SC-1, 20 MAR 2025 to 17 APR 2025

SC-1, 20 MAR 2025 to 17 APR 2025